



KEYLIGHT

SPAIN

LIGHTING PRODUCTS

MAGNETIC LIGHTS

ABOUT US

Keylight Spain is a leading specialist in lighting products from Valencia, Spain.

We use the latest **LED technology** to create a unique range of lighting solutions.

Known by the high quality of our materials and innovative approaches when it comes to lighting, we offer a comprehensive selection of products, including LED lights, luminaires, drivers, control systems, accessories and more.

Our creative scope allows us to tackle even the most complex lighting projects, while our extensive experience and customer service ensure your lighting needs are met with the utmost satisfaction.

Therefore, our mission is to meet and satisfy the needs of our clients, with tailored products and services including collaborative marketing campaigns and market-specific product design to support our partners worldwide.



MAGNETIC
LIGHTS

LISA SERIES

KEYLIGHT

SPAIN


LIGHTING PRODUCTS



TRACK STRUCTURE

Inner wide size: 15 mm

Height: 14.25 mm

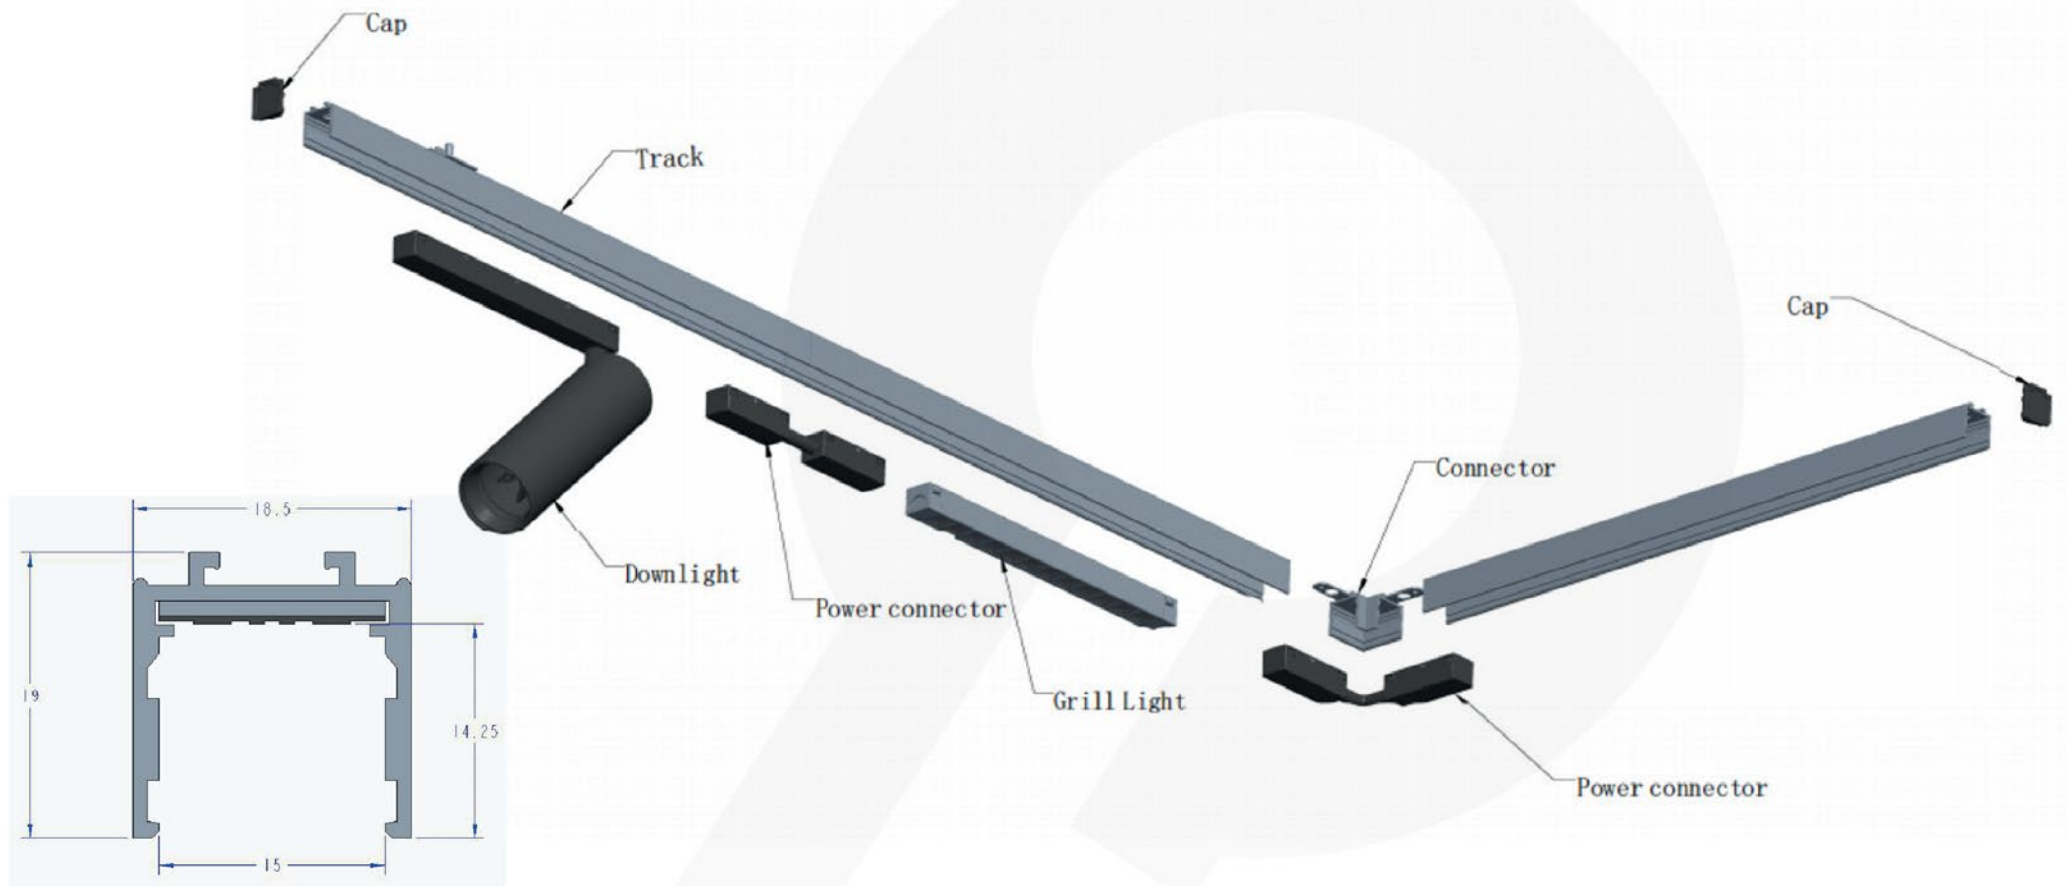



Features:

- 💡 Size looks smart and elegant
- 💡 Magnetic system can be freely combined and disassembled.
- 💡 Low voltage: safe and reliable for operation
- 💡 Customized intelligent control: Smartphone app to adjust the dimmer, color temperature, and/or control single light.
- 💡 Adjusting the quantity of lamps according to the distance of the track to meet the light effect requirements of the space.
- 💡 Beam angle can be adjusted according to customer's needs.
- 💡 The light installation structure can be recessed, surface-mounted or hanged to meet customer's diversified needs. It has a simple structure to easily install and replace.
- 💡 The magnetic track light is ideal for hotels, villas, supermarkets, offices, and commercial or residential spaces.
- 💡 Small power supply to be installed in the track. No external exposure for a clean look.



Freely combination:

Track: 1m length or 2m length (optional)

Lights: Pendant light + grill light + linear light
spotlight + fold light (optional)

Connector: right angel shape, external corner,
internal corner (optional)

Power connector: mini size

Color: black/white (optional)

Installation method:


Recessed

Surface-mounted

Pendant light

Application:

Hotel villas, supermarkets, shops, offices,
commercial and residential spaces.

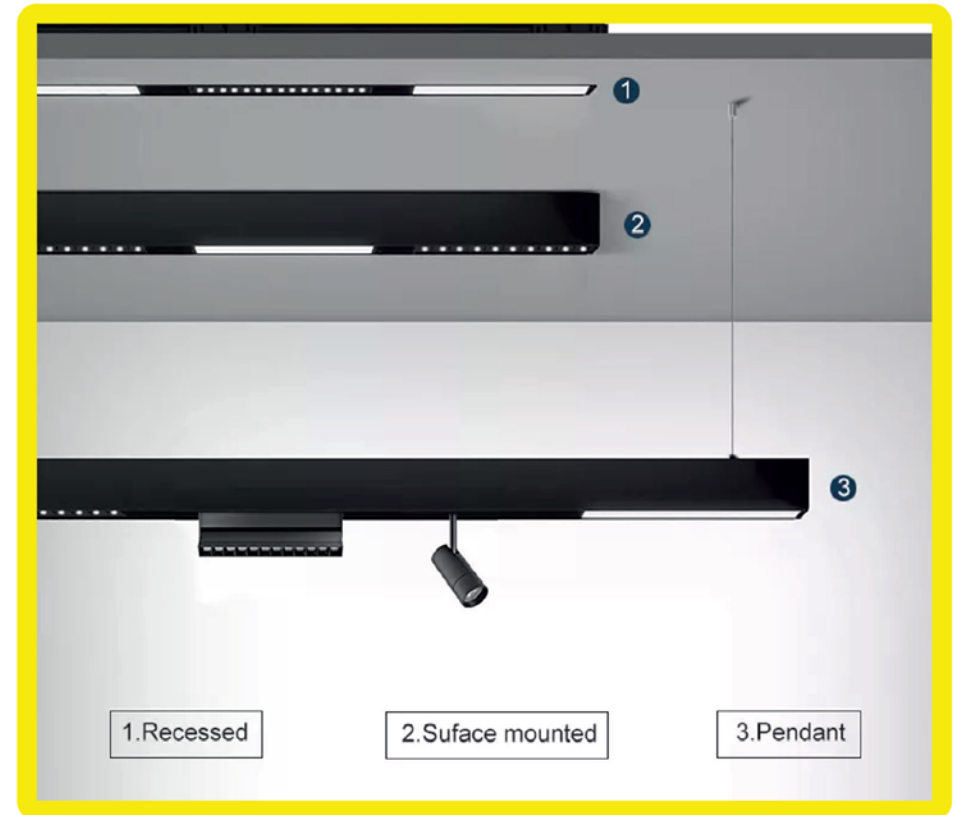

KEYLIGHT

SPAIN

LIGHTING PRODUCTS

SURFACE MOUNTED TRACK
L:1000 (mm)

SV-TR-18100



SURFACE MOUNTED TRACK
L:1000 (mm)

SV-TR-19100



RECESSED MOUNTED TRACK
L:1000 (mm)

SV-TRM-47100




LINEAR LIGHT
L:174 | W:14 | H:14 (mm)
L:300 | W:14 | H:14 (mm)

SV-LN-30




ADJUSTABLE LINEAR LIGHT
L:172.5 | W:14.8 | H: 39 (mm)

SV-DN-171

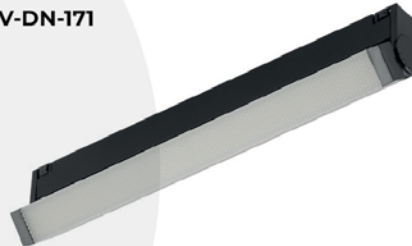

GRILL LIGHT
L:174 | W:14.8 | H:14 (mm)
L:300 | W:14.8 | H:14 (mm)

SV-DT-1174

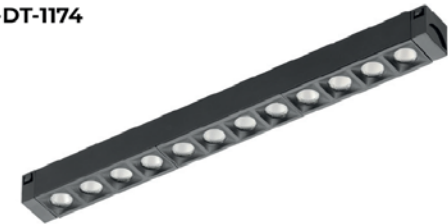

ADJUSTABLE GRILL LIGHT
L:172.5 | W:14.8 | H:39 (mm)



LIGHTS

SPOTLIGHT

D: 35 | H: 62 (mm) - 5W

SV-SP-0535



SPOTLIGHT

D: 35 | H: 80 (mm) - 8W

SV-SP-3508



SPOTLIGHT

D: 35 | H: 110 (mm) - 12W

SV-SP-3512



SPOTLIGHT

D: 40 | H: 140 (mm) - 12W

SV-SP-4012



SPOTLIGHT

D: 25 | H: 150 (mm) - 10W

SV-SP-2510



LIGHTS

POWER BOX

L63 | H14 | W14.8 (mm)



CONNECTOR

L63 | H14 | W14.8 (mm)



FLEXIBLE POWER BOX

L175 | H14 | W14.8 (mm)



ACCESSORIES



MIKE SERIES

KEYLIGHT

SPAIN


LIGHTING PRODUCTS



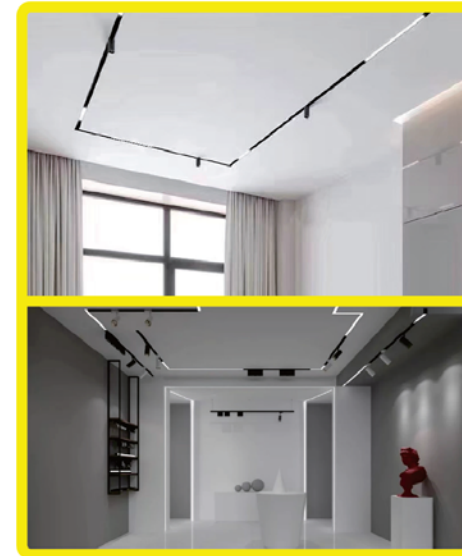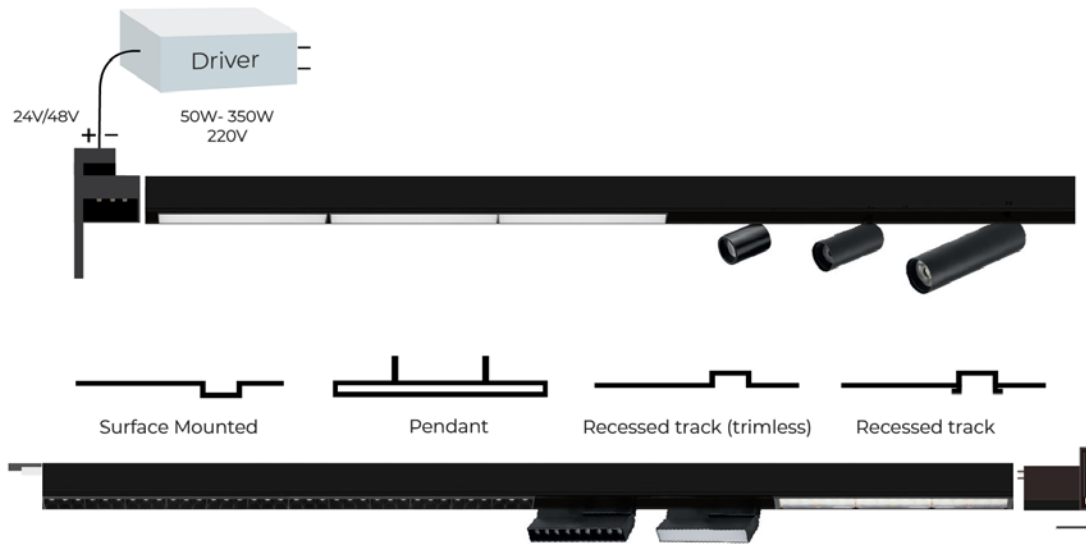

DALI intelligent control is available, mobile phone-specific APP that can be used to adjust the brightness, color temperature and control specific light.

Track Connector Module

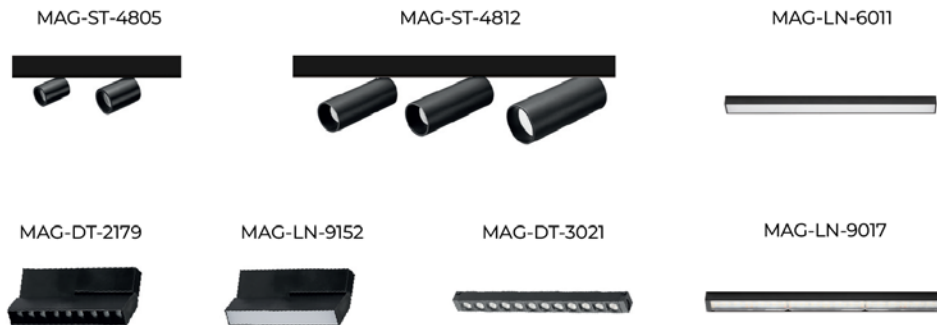

= 180°
= Connection module




L 90° N
IN 7 Connection module



T 90°
T Connection module



L 90° W
IN 7 Connection module





L 90°
L Connection module




Triac Dimmable | **TRIDONIC PHILIPS** Dimming Solution | **0-10V dimmable**


MAG-TRM-551000

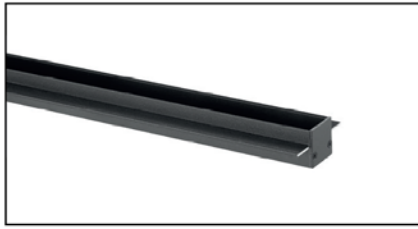


Recessed track (trimless)
cut out (mm)
28x1000
20x1996

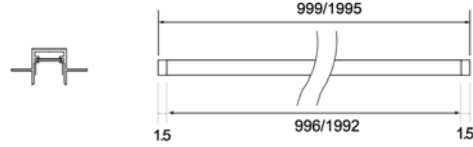

MAG-TR-371000

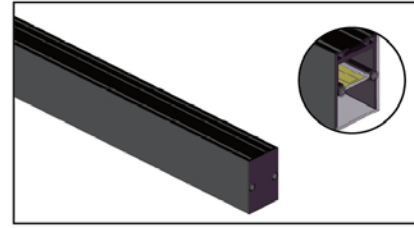


Surface-mounted track

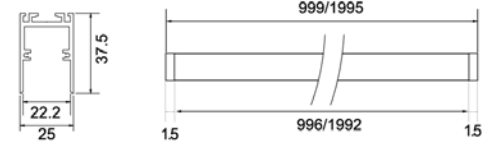


MAG-TRM-351000




Recessed track



cut out (mm)
28x1002
28x2000

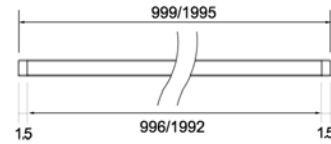


MAG-PN-621000

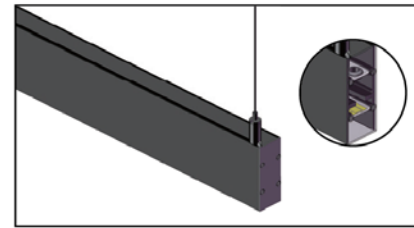

Pendant



Up & Down

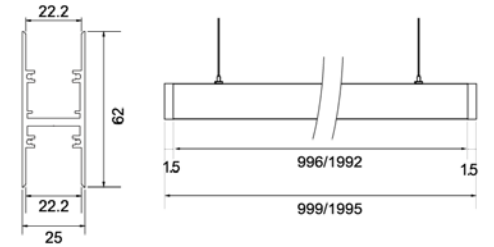

MAG-TR-251000S





Surface-mounted track

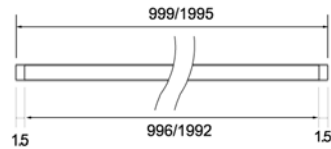

MAG-PN-361000




Pendant

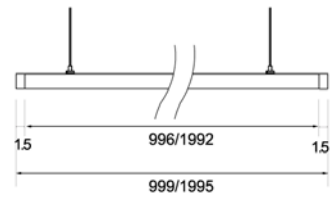





Recessed track (trimless)

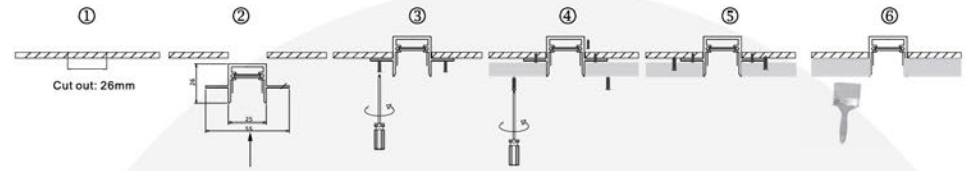


Recessed track (trimless)

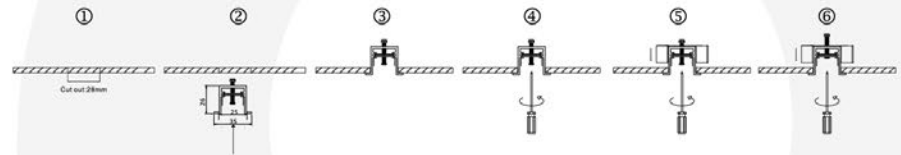

Surface-mounted track

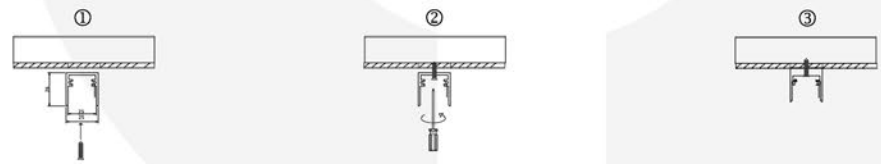

Pendant

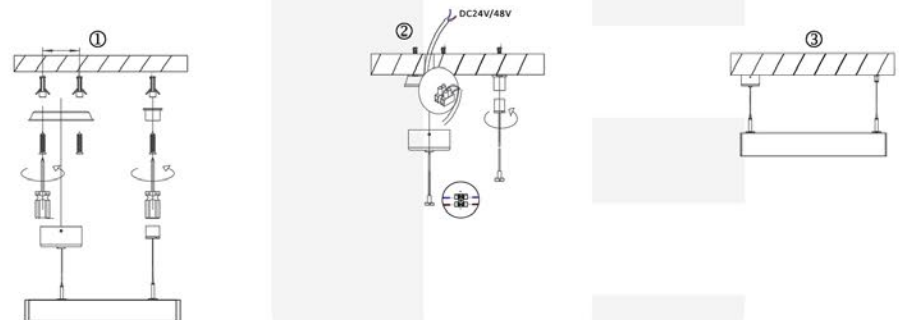



MAG-D-48150



Total Power Consumed (W) > 150 W

Operating temperature range > -20 < Ta < +40

Operating Voltage (Vac) > DC 48V


Installation > MAG series track

IP Rating IP20


Dimension (mm) > 300*22*21mm

Warranty > 5 years


MAG-LN-3005

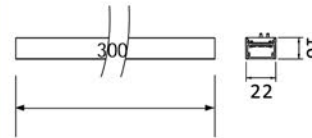

MAG-LN-6011

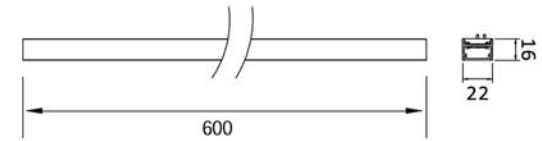


MAG-LN-9017

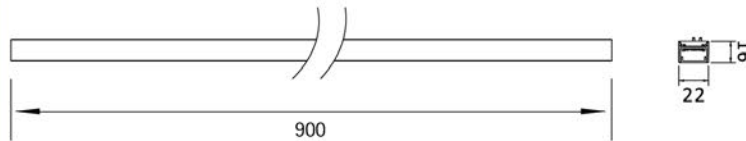

Power	5.5W/11W/16.5W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	100°
Color	Black/White
Size (mm)	5.5W: 22x16x300mm 11W: 22x16x600mm 16.5W: 22x16x900mm


Photometric Diagram

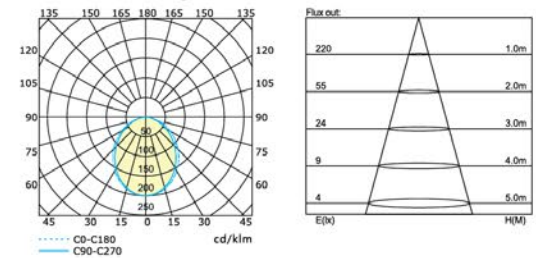


Triac Dimmable | TRIDONIC PHILIPS EAGLE RISE Dimming Solution | 0-10V dimmable



MAG-ST-4803





MAG-ST-54805



CCT	3000K/4000K/6000K
CRI	>90
Input Voltage	24V/48V
Beam Angle	20°/30°/40°/50°/60°
Color	Black/White
Size (mm)	3W: Φ35x68x75mm 5W: Φ35x80x75mm

Photometric Diagram










MAG-SP-4807

MAG-SP-4812

MAG-SP-4815

MAG-SP-4818

MAG-SP-4824



Power	7W/12W/15W/18/24W
CCT	3000K/4000K/6000K
CRI	>90
Input Voltage	24V/48V
Beam Angle	15°/24°/36°/60°
Color	Black/White

MAG-LN-9152




MIKE SERIES



MAG-DT-2179



Power	6W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	110°
Color	Black/White
Size (mm)	25.5x79x152mm

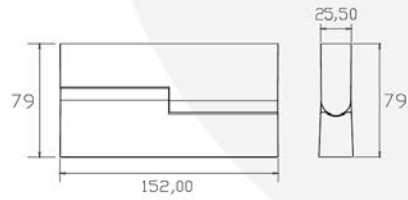


Power	6W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	25°/30°/60°
Color	Black/White
Size (mm)	25.5x79x152mm

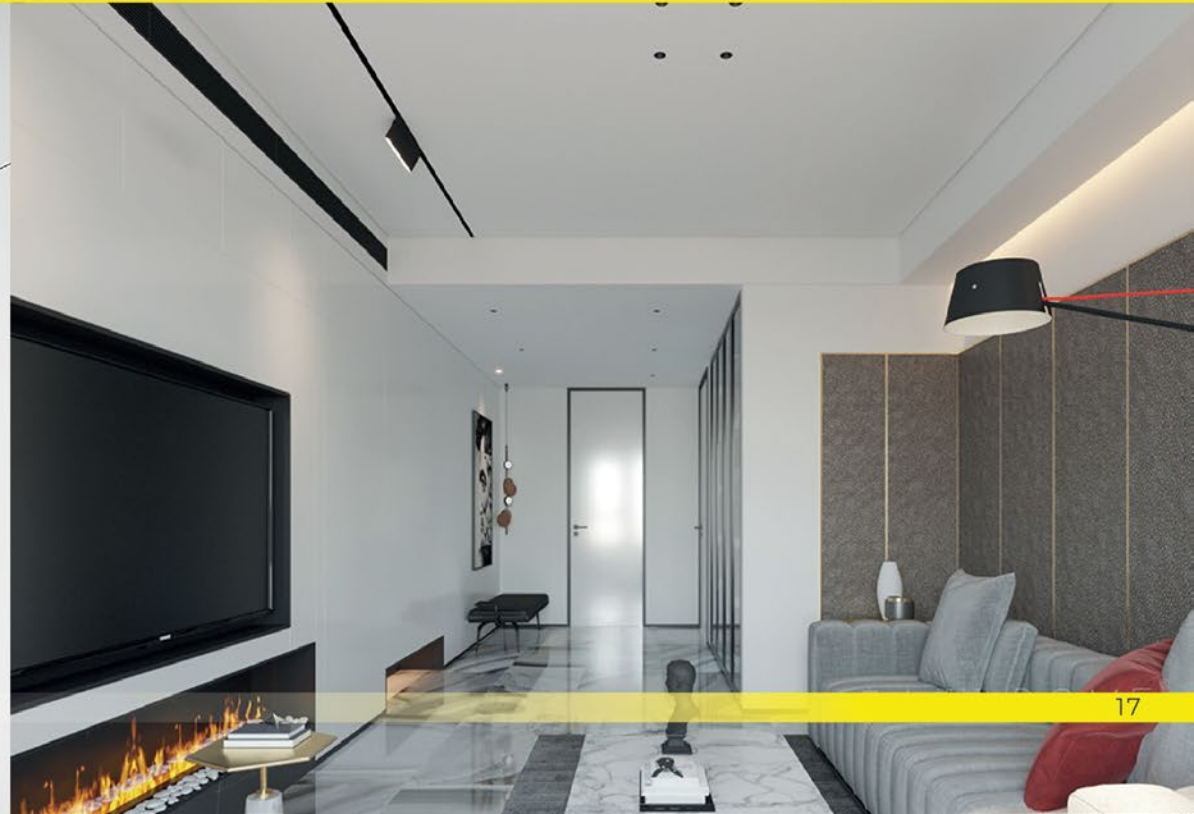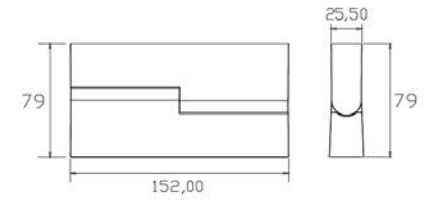

MAG-LN-2921





Power	7W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	LR25°/P18°/30°/90° LR40°/60°/110°/90x110°
Color	Black/White
Size (mm)	21.5x17x297mm



MAG-DT-3021



Power	7W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	25°/30°/60°
Color	Black/White
Size (mm)	21.5x21.5x300mm

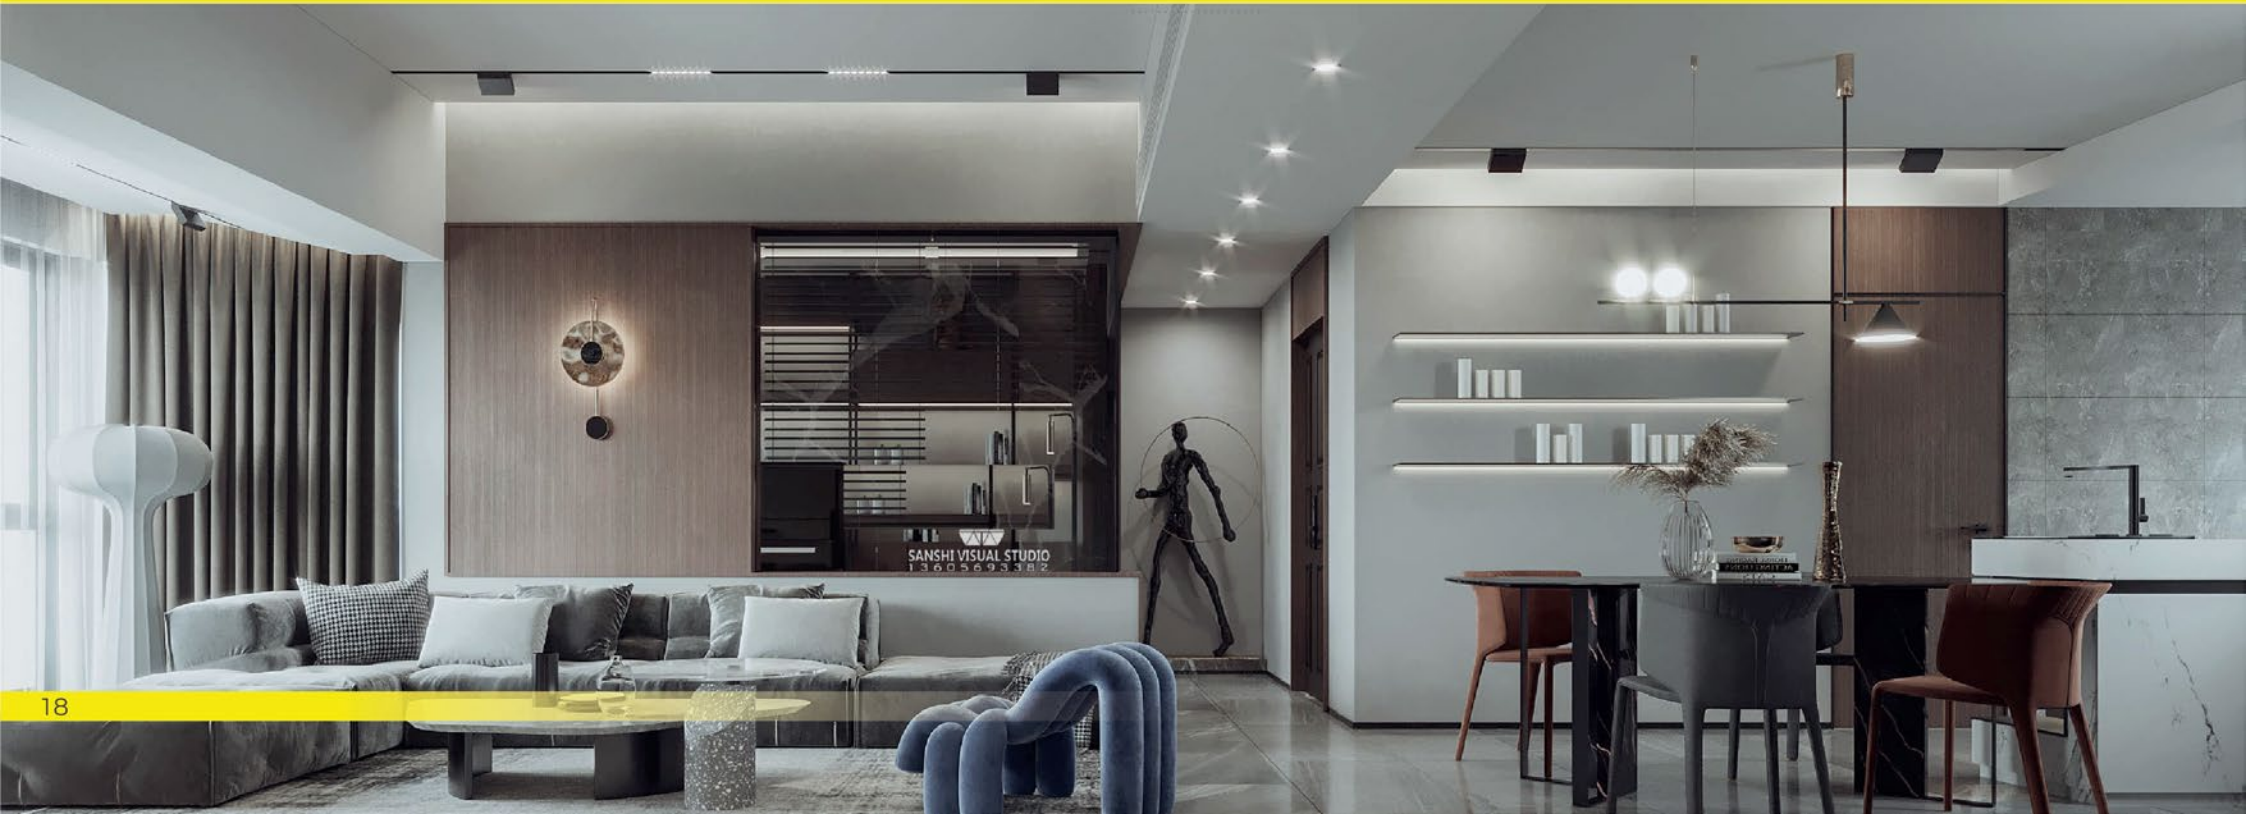




DAVID SERIES


KEYLIGHT

SPAIN


LIGHTING PRODUCTS



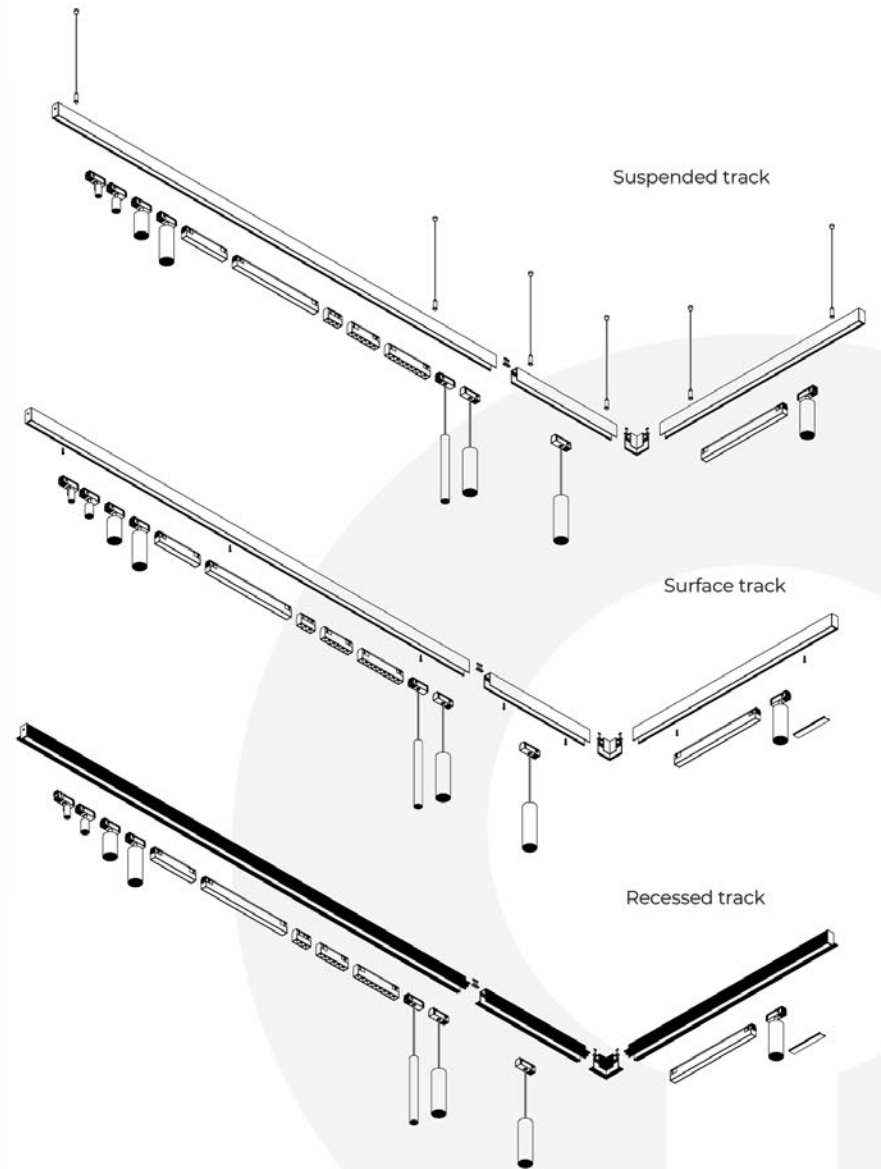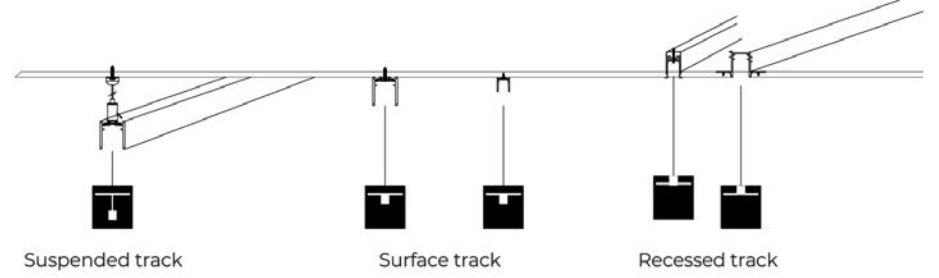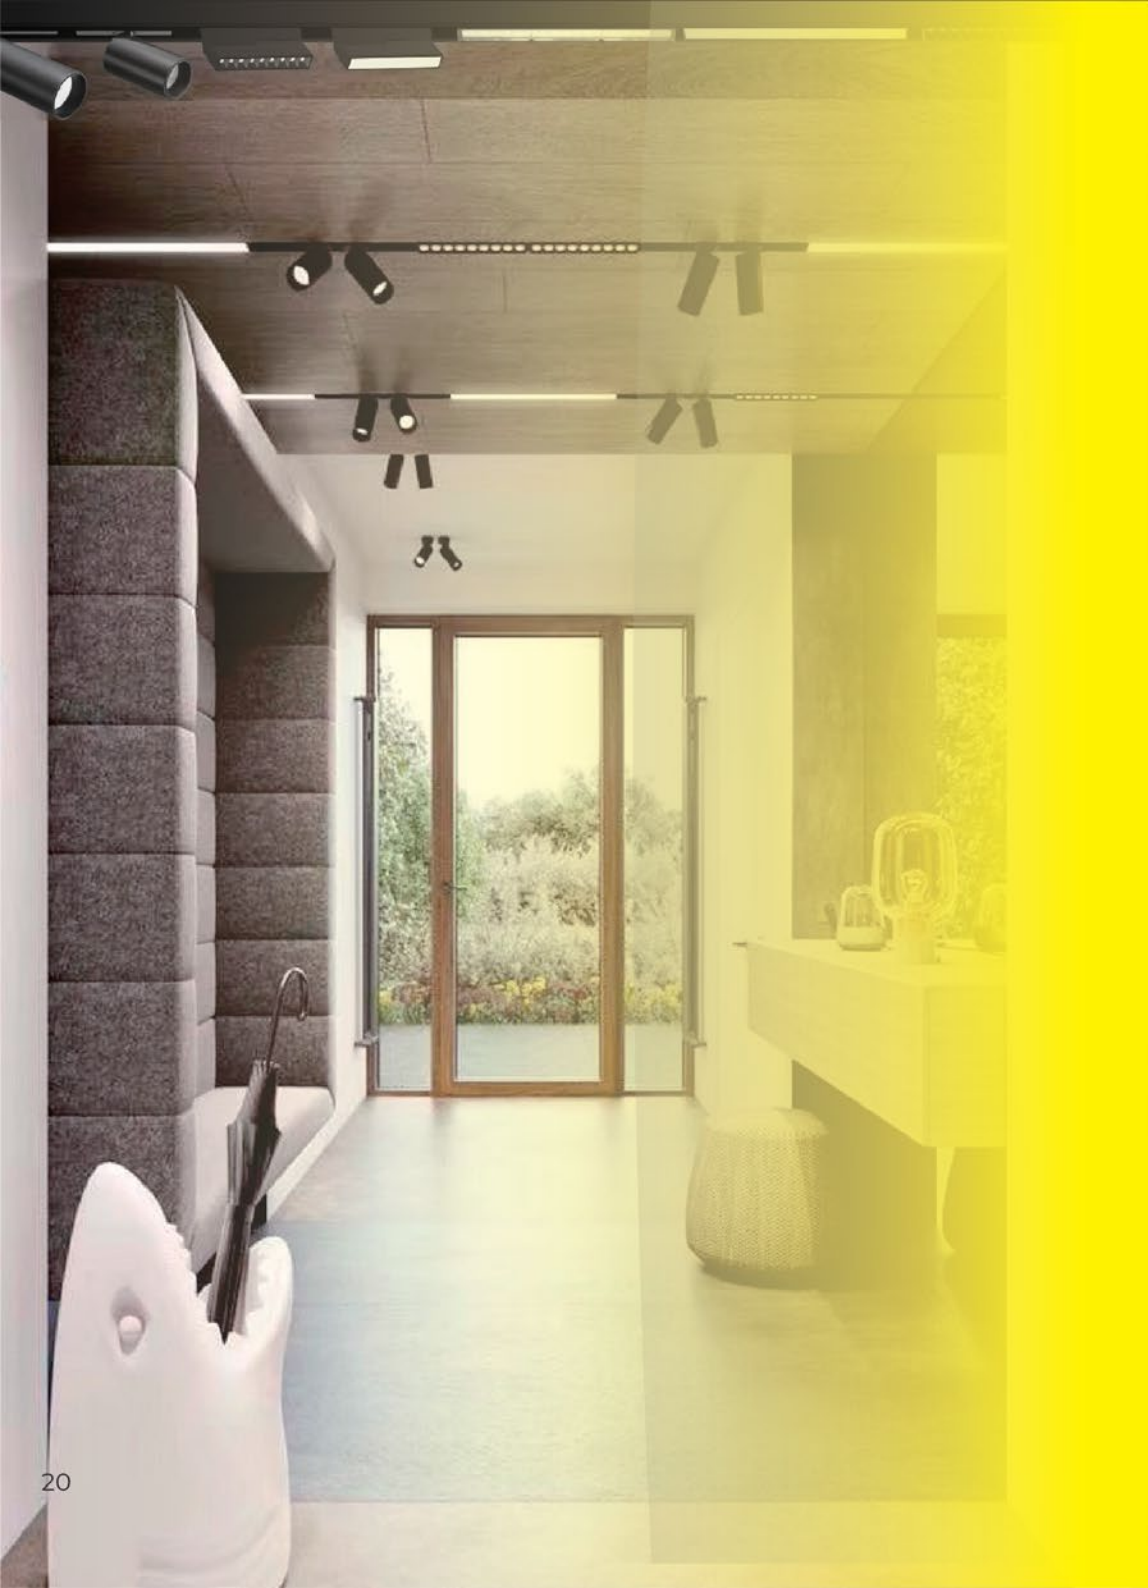

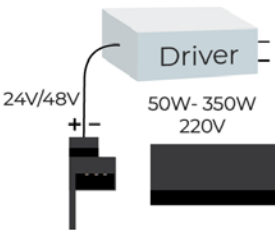

THE LV TRACK SYSTEM CAN BE MOVED AROUND AND ALSO COMBINED OR CHANGED



DV-LN-3430



DV-DT-34137



DV-SP-6220



DV-PD-150



DV-LN-1355



DV-DT-3616



DV-PD-4502



DV-PD-3515




DALI intelligent control is available, mobile phone-specific APP that can be used to adjust the brightness, color temperature and control specific light.

Track Connector Module



L 90°
L Connection module




L 90° N
IN 7 Connection module




= 180°
= Connection module




T 90° W
T Connection module




T 90°
T Connection module

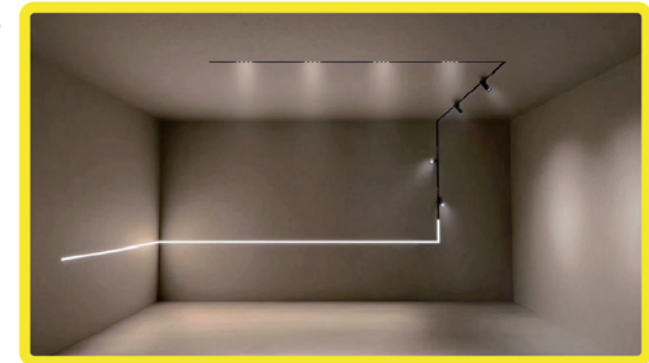


DV-TRM-120100



Recessed track (trimless)
cut out (mm)
75x1002
75x1998

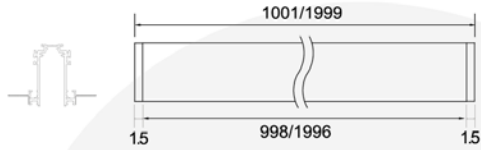


Recessed track (trimless)

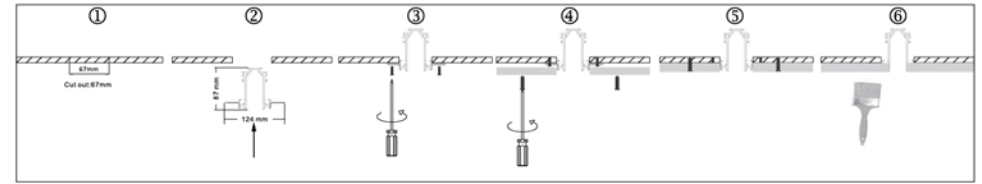


DV-TRM-55100



Recessed track
cut out (mm)
47x1004
47x2004

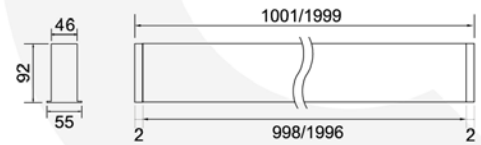


Recessed track

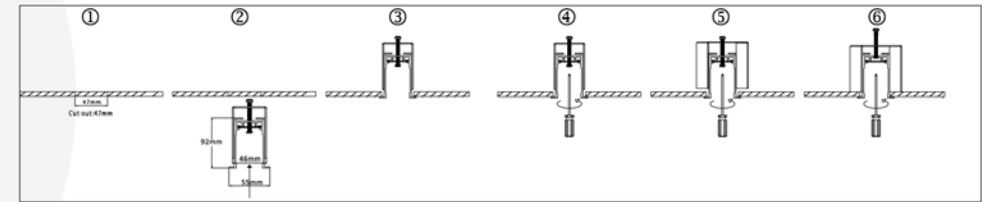


DV-TR-40100



Pendant/Surface-mounted track

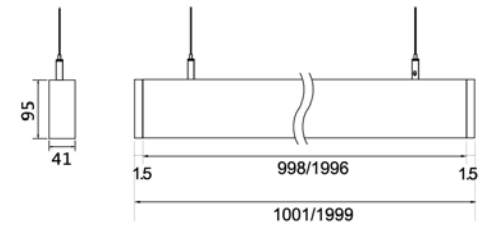

Pendant

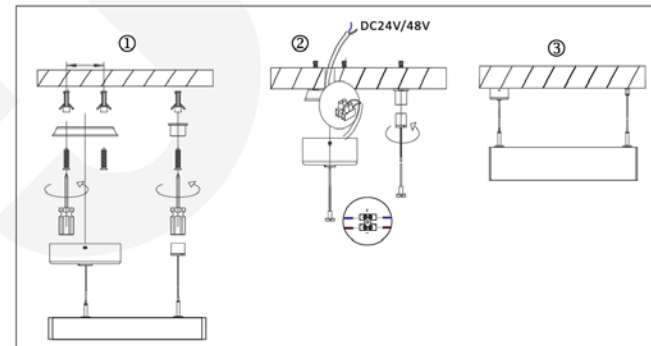



DV-D-48150




- Total Power Consumed (W) > 150 W + 12W
- Total light output (lm) > 595 lm
- Efficacy (lm/W) > 960 lm/W
- Correlated Colour Temperature (k) > 3000K/4000K
- Color Rendering Index (Ra) > 90
- Operating temperature range > -20 < Ta < +40
- Operating Voltage (Vac) > DC 48V
- Beam angle > 110°
- Installation > MAG series track
- IP Rating IP20
- Dimension (mm) > 400*34*70mm
- Warranty > 5 years




- DV-LN-3430
- DV-LN-3460
- DV-LN-3490


- CCT 3000K/4000K/6000K
- CRI >85
- Input Voltage 24V/48V
- Beam Angle 100°
- Color Black/White

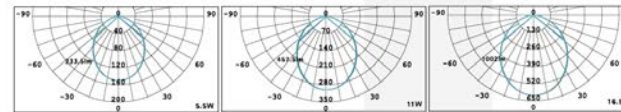

5.5W		11W		16.5W	
1x 14.17, 181.616	202.50mm	1x 11.1, 188.616	202.50mm	1x 8.613, 716	188.60mm
1x 14.04, 17.7416	443.00mm	1x 8.51, 76.3916	443.00mm	1x 8.17, 193.616	474.00mm
1x 8.461, 16.7116	607.60mm	1x 12.12, 10.9116	607.60mm	1x 24.01, 68.1016	714.00mm
1x 2.712, 7.40116	800.10mm	1x 7.376, 13.9116	800.10mm	1x 14.16, 16.3916	800.10mm



Triac Dimmable | TRIDONIC PHILIPS EAGLE RISE Dimming Solution | 0-10V dimmable

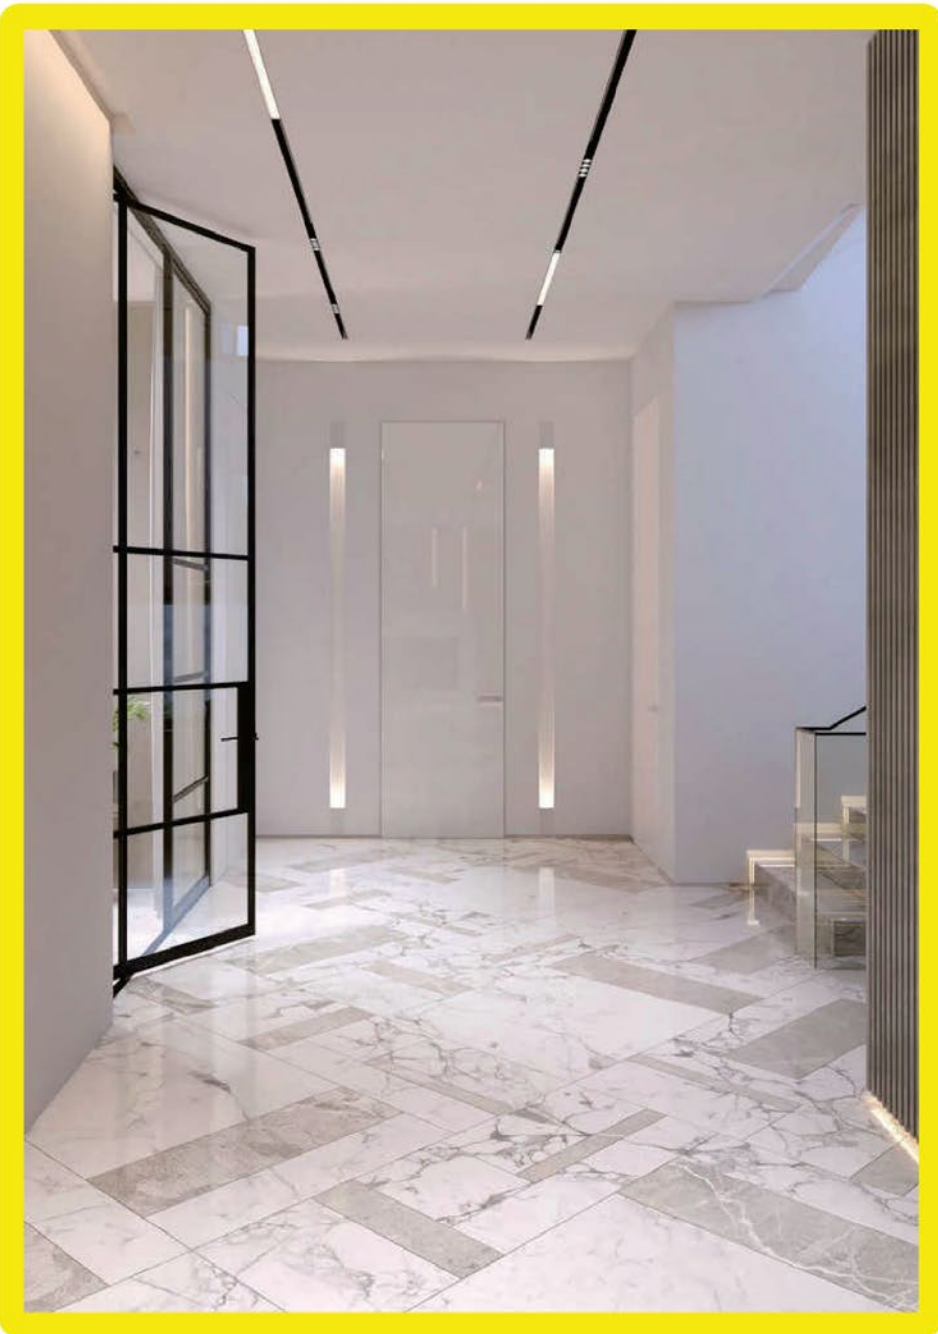

DV-DT-34137

DV-DT-34270

DV-DT-3440


CCT 3000K/4000K/6000K

 CRI >85

 Input Voltage 24V/48V

 Beam Angle 15°/30°/45°

 Color Black/White

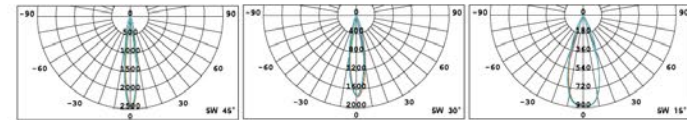


102 Slim SW 45°		128 Slim SW 30°		209 Slim SW 15°	
Ia	1482,1282lx	Ia	2167,1789lx	Ia	470,7,490,91lx
Ib	412,4,432,51lx	Ib	390,7,441,51lx	Ib	154,4,161,71lx
Ic	149,5,161,51lx	Ic	129,2,141,51lx	Ic	70,33,76,96lx
Id	109,2,119,51lx	Id	79,47,111,30lx	Id	39,51,51,49lx
	24,97m		34,76m		43,51m
	44,93m		73,51m		137,51m
	74,90m		112,47m		190,76m
	98,87m		147,93m		234,09m




Triac Dimmable | **TRIDONIC PHILIPS** **EAGLE RISE** Dimming Solution | 0-10V dimmable

CCT 3000K/4000K/6000K
 CRI >90
 Input Voltage 24V/48V
 Beam Angle 15°/25°/36°
 Color Black/White
 Size (mm) Φ 40 | L: 150 | H: 156


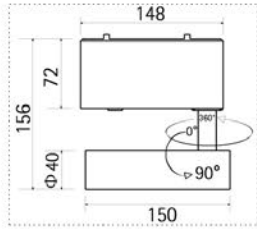


DV-SP-4010

CCT 3000K/4000K/6000K
 CRI >90
 Input Voltage 24V/48V
 Beam Angle 15°/25°/35°/60°
 Color Black/White
 Size (mm) Φ 62 | L: 148 | H: 184

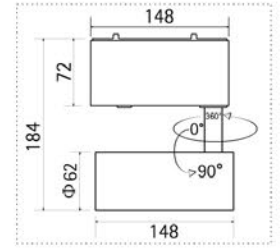

DV-SP-6220

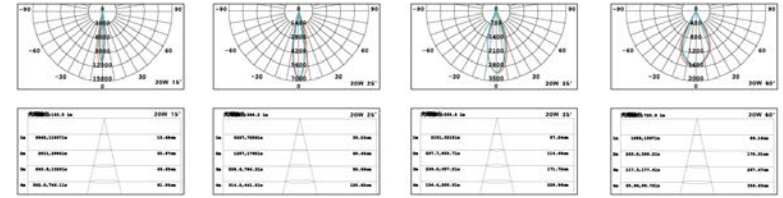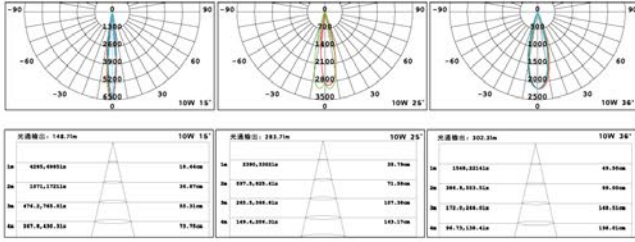



CCT 3000K/4000K/6000K

CRI >90

Input Voltage 24V/48V



Beam Angle 12°/25°/36°

Color Black/White

Size (mm) Φ 75 | L: 158 | H: 205



DV-SP-7530

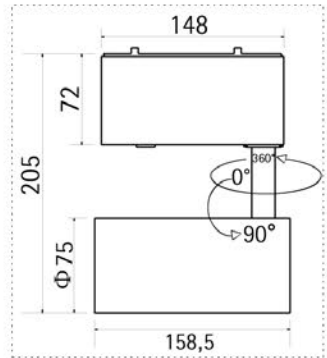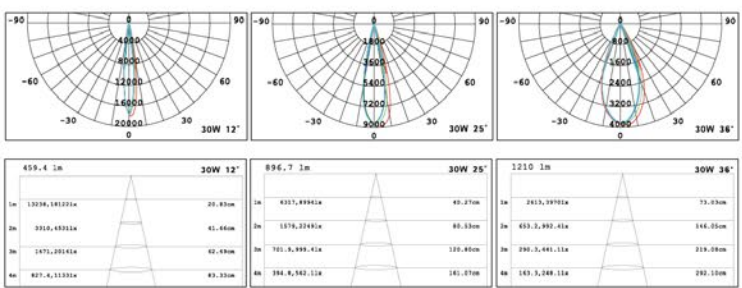


KEYLIGHT

SPAIN




LIGHTING PRODUCTS



DV-DT-3616

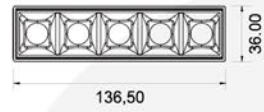


DV-LN-1355

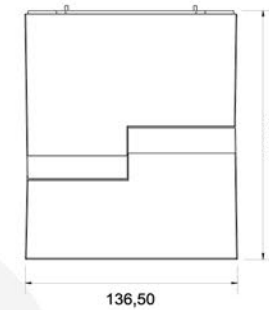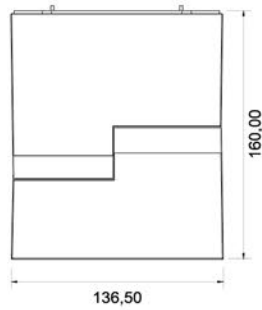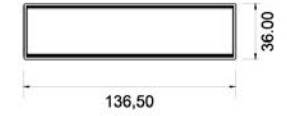


Power	15W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	12°/30°/45°
Color	Black/White
Size (mm)	36x160x135.5 mm



Power	15W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	110°
Color	Black/White
Size (mm)	36x160x135.5 mm


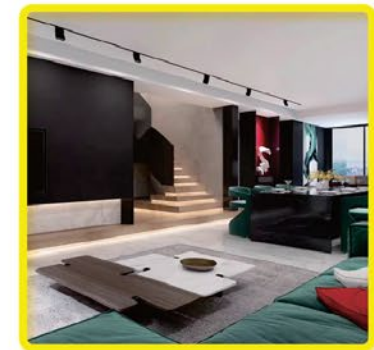


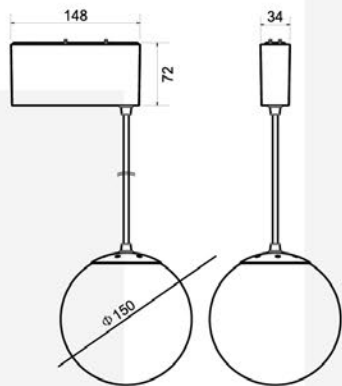


Power	8W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	120°
Color	Black/White




DV-PD-150

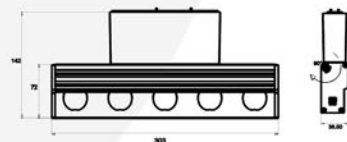


Power	8W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	Polarized 70°
Color	Black/White

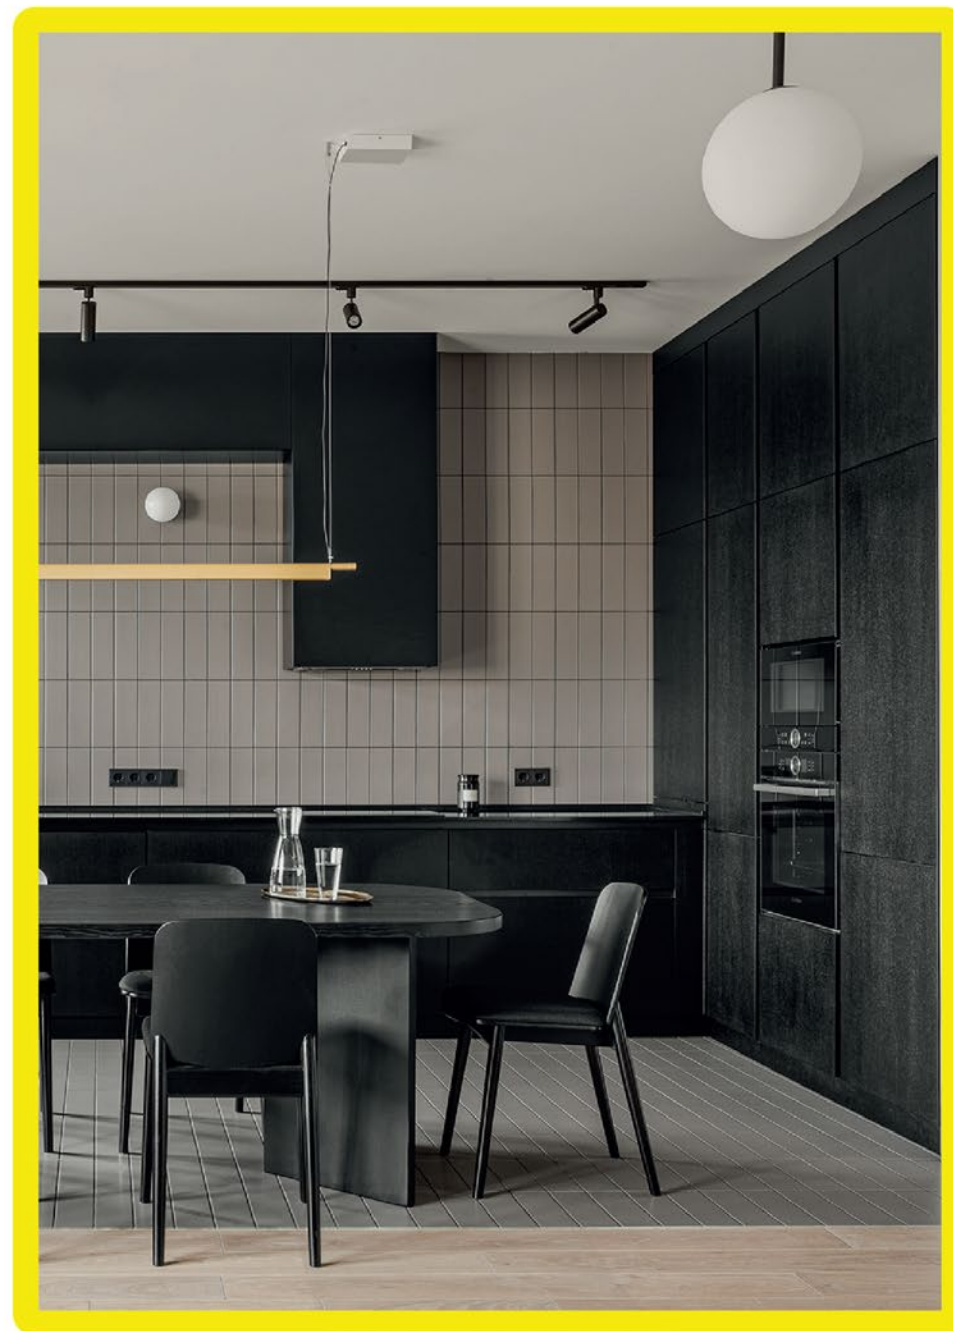

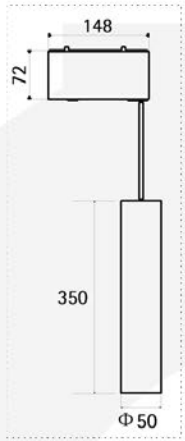

DV-PD-3515


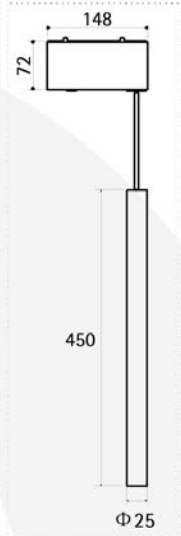


DV-PD-4502



Power	15W/2.2W
CCT	3000K/4000K/6000K
CRI	>85
Input Voltage	24V/48V
Beam Angle	25°/60°
Color	Black/Silver/Gold
Size (mm)	3515: Φ50×350mm 4503: Φ25×450mm

Photometric Diagram




MAX 360 SERIES



KEYLIGHT
SPAIN
LIGHTING PRODUCTS

Cylinder Track System

DC 48V

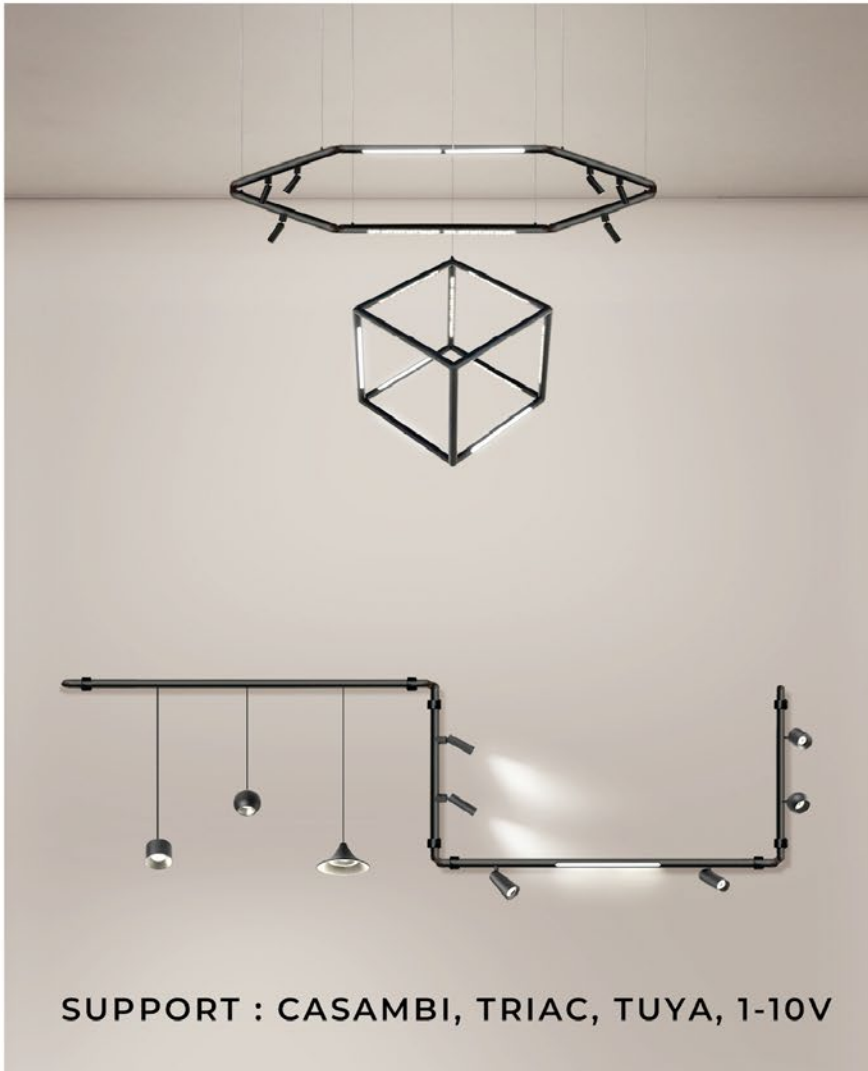

Connector Angle






MAX 360 SERIES


Spot light




Model	MAX-SP-3	MAX-SP-2*3	MAX-SP-10	MAX-SP-2*10	MAX-SP-20	MAX-SP-2*20
Power	3W	2*3W	10W	2*10W	20W	2*20W
Beam angle	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°



Flood light

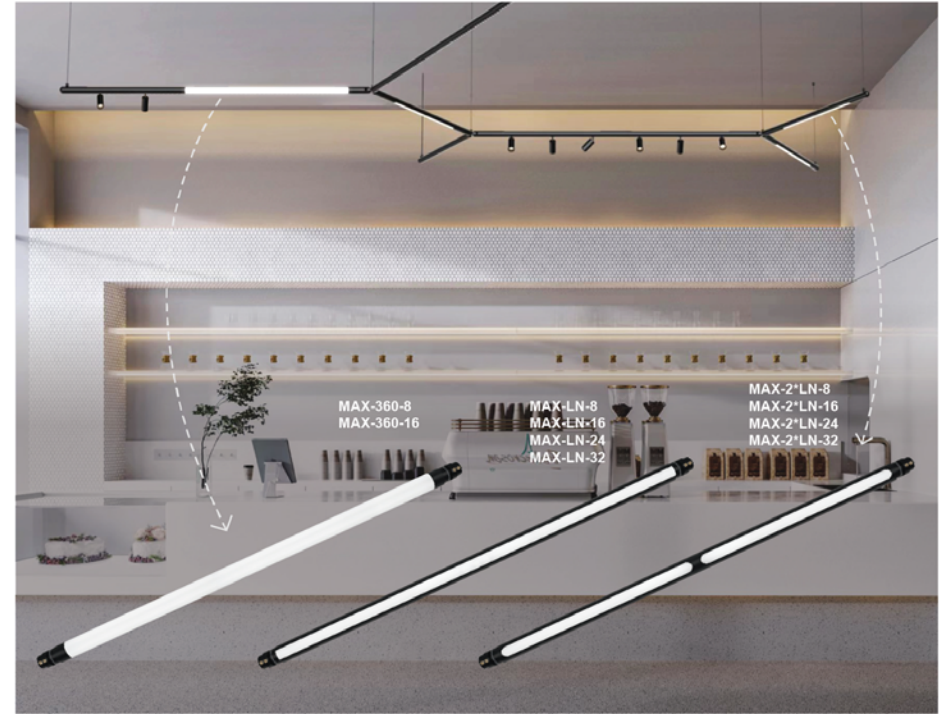




Model	MAX360-LN-8W/16W	MAX-LN-8W/16W	MAX-LN-24W/32W	MAX-LN-8W/16W	MAX-LN-24W/32W
Power	8W / 16W	8W / 16W	24W / 32W	8W / 16W	24W / 32W
Beam angle	360°	110°	110°	110°	110°






Grille light



Model	MAX-DT-8	MAX-DT-16	MAX-DT-24	MAX-DT-32	
Power	8W /16W	8W /16W	24W / 32W	24W / 32W	/
Beam angle	24°	24°	24°	24°	/

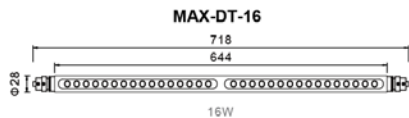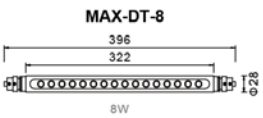


Pendant-detachable

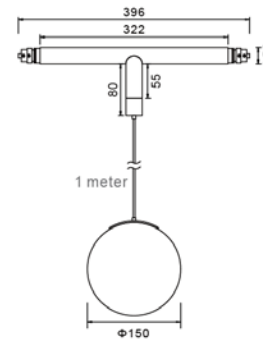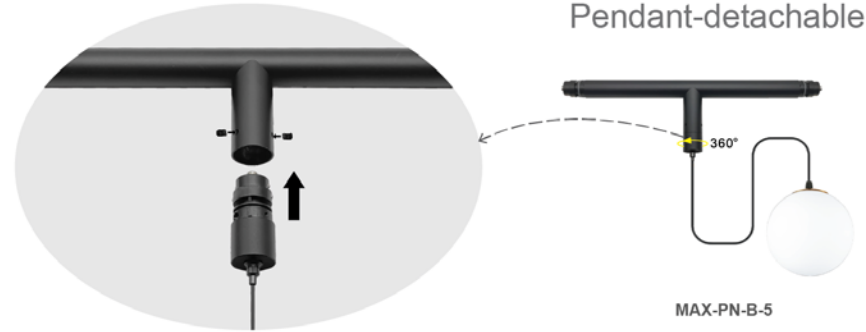

Model	Power	Beam angle	Size
MAX-PN-B-5	5W	360°	Φ150mm
MAX-PN-S-8	8W	15°/24°/38°	Φ150*110mm
MAX-PN-S-18	18W	15°/24°/38°	Φ380*190mm
MAX-PN-L-2.2	2.2W	25°/60°	Φ35*H300mm
MAX-PN-L-15	15W	25°/60°	Φ50*H300mm
MAX-PN-O-10	10W	24°/36°	Φ80*70mm
MAX-PN-V-10	10W	10~55°	Φ100*85mm

MAX 360 SERIES

Pendant-integrated

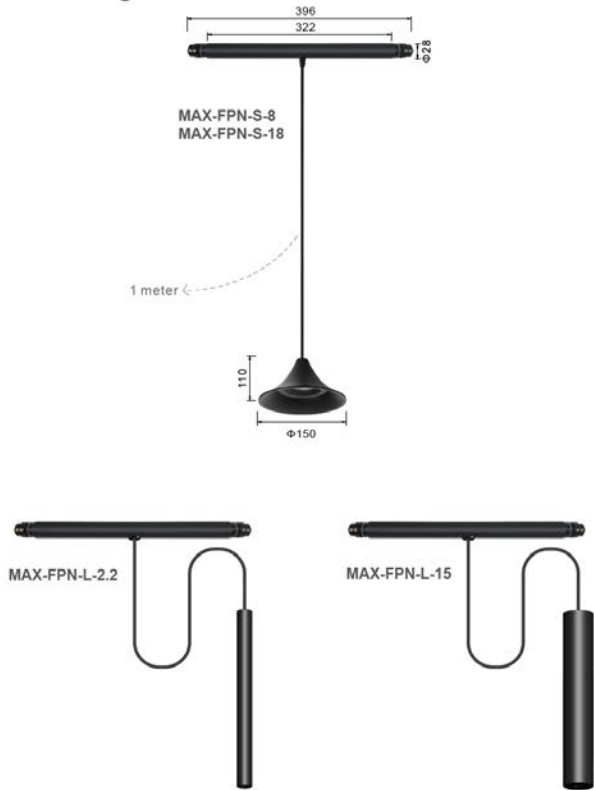

Parameter

Parameter	Model	Power	Beam angle	Size
CRI: ≥90	MAX-FPN-S-8	8W	15°/24°/36°	Φ150*110mm
CCT: 3000K / 4000K	MAX-FPN-S-18	18W	60°	Φ380*190mm
Input: DC 48V	MAX-FPN-L-2.2	2.2W	24°	Φ35*L300mm
Color: ● ○	MAX-FPN-L-15	15W	15°/24°/36°	Φ60*L300mm



Pendant-integrated






Parameter

Parameter	Model	Power	Beam angle	Size
CRI: ≥90	MAX-FPN-O-10	10W	24°/36°	Φ80*70mm
CCT: 3000K / 4000K	MAX-FPN-V-10	10W	10-55°	Φ100*85mm
Input: DC 48V	MAX-FPN-B-5	5W	360°	Φ150mm
Color: ● ○				



Accessories

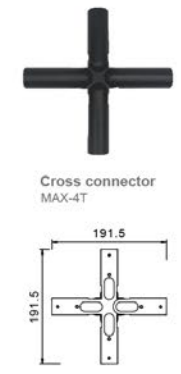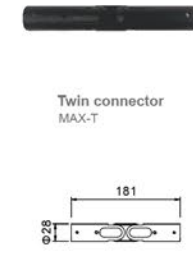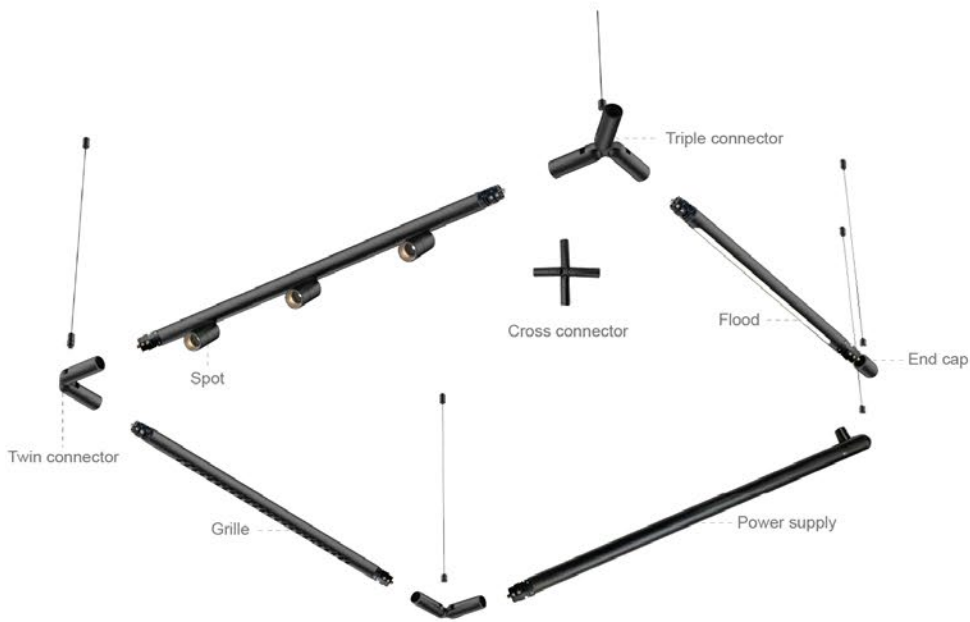




PEARL SERIES

KEYLIGHT


SPAIN

LIGHTING PRODUCTS

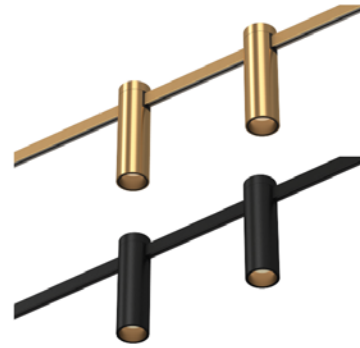


LED | | 24V | CE IP20 | CRI90

Model No.	LWQ-M31	Beam Angle	60 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	5W	Warranty	3 Years
LED Light Source	COB (3000K/4000K)	Certification	CE,CCC

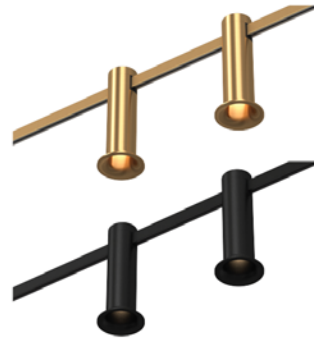


LED | | 24V | CE IP20 | CRI90

Model No.	LWQ-M33	Beam Angle	60 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	5W	Warranty	3 Years
LED Light Source	COB (3000K/4000K)	Certification	CE,CCC

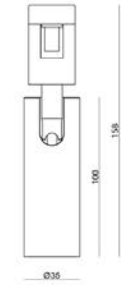

LED | 24V | CE IP20 | CRI90

Model No.	LWQ-M35	Beam Angle	60 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	5W	Warranty	3 Years
LED Light Source	COB (3000K/4000K)	Certification	CE,CCC




LED | 24V | CE IP20 | CRI80/90



Model No.	LWQ-M37	Beam Angle	60 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	3W	Warranty	3 Years
LED Light Source	Osram 3030 (3000K/4000K)	Certification	CE,CCC



LIGHTING PRODUCTS

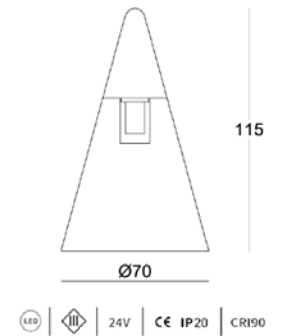


Model No.	LWQ-M39	Beam Angle	60 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	5W	Warranty	3 Years
LED Light Source	COB (3000K/4000K)	Certification	CE,CCC

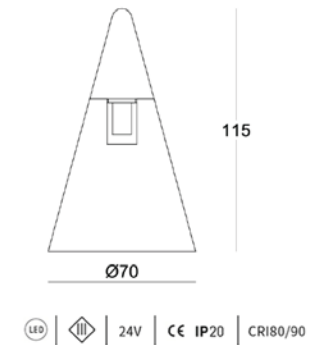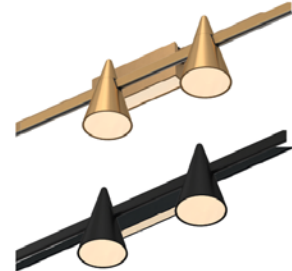

Model No.	LWQ-M41	Beam Angle	120 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	3W	Warranty	3 Years
LED Light Source	Osram 2835 (3000K/4000K)	Certification	CE,CCC



LED | | 24V | CE IP20 | CRI80/90



Model No.	LWQ-M43	Beam Angle	120 Degrees
Finish Color	Sandy Black+Glass / Sandy black + Smokey Gray Glossy Gold + Glass / Glossy Gold + Smokey Gray	Installation	Magnetic Track Mounted
Input Power	3W	Warranty	3 Years
LED Light Source	Osram 3030 (3000K/4000K)	Certification	CE,CCC




LED | | 24V | CE IP20 | CRI80/90





Model No.	LWQ-M45	Beam Angle	120 Degrees
Finish Color	Sandy Black+Glass / Sandy black + Smokey Gray Glossy Gold + Glass / Glossy Gold + Smokey Gray	Installation	Magnetic Track Mounted
Input Power	3W	Warranty	3 Years
LED Light Source	Osram 3030 (3000K/4000K)	Certification	CE,CCC




LED | | 24V | CE IP20 | CRI80/90




Model No.	LWQ-M47	Beam Angle	120 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	5W	Warranty	3 Years
LED Light Source	Osram 2835 (3000K/4000K)	Certification	CE,CCC

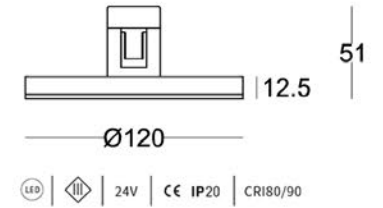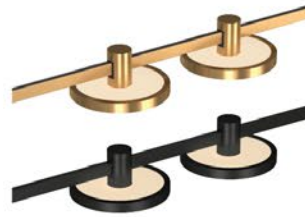

Model No.	LWQ-M53	Beam Angle	120 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	7W	Warranty	3 Years
LED Light Source	Edison 2835 (3000K/4000K)	Certification	CE,CCC

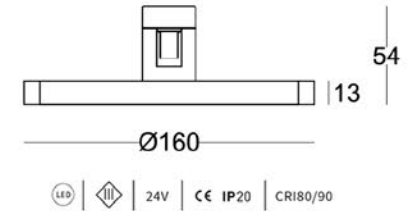

Model No.	LWQ-M55	Beam Angle	120 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	9W	Warranty	3 Years
LED Light Source	Edison 2835 (3000K/4000K)	Certification	CE,CCC

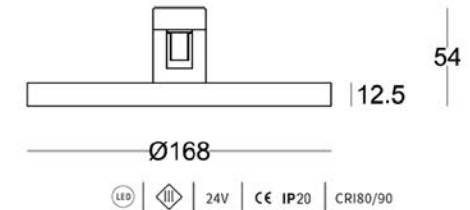

Model No.	LWQ-M57	Beam Angle	120 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	10W	Warranty	3 Years
LED Light Source	Edison 2835 (3000K/4000K)	Certification	CE,CCC



LED | | 24V | CE IP20 | CRI80/90

Model No.	LWQ-M49	Beam Angle	24/40 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	6W / 12w	Warranty	3 Years
LED Light Source	osram 3030 (3000K/4000K)	Certification	CE,CCC



KL-M51




LED | | 24V | CE IP20 | CRI80/90


Model No.	LWQ-M51	Beam Angle	120 Degrees
Finish Color	Sandy Black / Glossy Gold	Installation	Magnetic Track Mounted
Input Power	6W / 12w	Warranty	3 Years
LED Light Source	osram 2835 (3000K/4000K)	Certification	CE,CCC

WALL LAMP/SURFACE

Set of accessories for Wall Lamp Application of Magnetic Rail

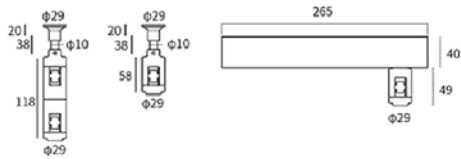


Set of accessories for Surface Application of Magnetic Rail

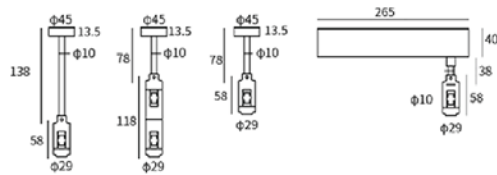


ACCESSORIES

ALL 24V TRACKS


Set of accessories for Pendant ① Application of Magnetic Rail

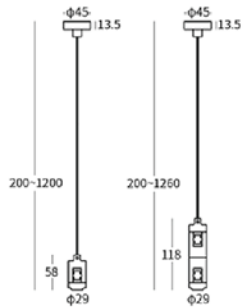


Set of accessories for Pendant ② Application of Magnetic Rail

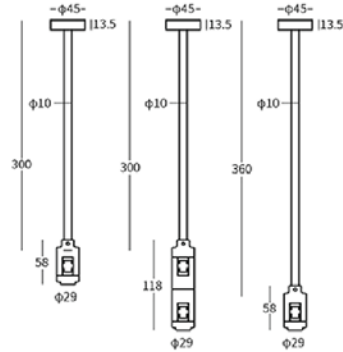


Set of accessories for Pendant ③ Application of Magnetic Rail


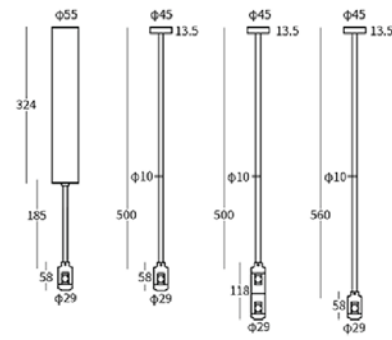


Set of accessories for Pendant ④ Application of Magnetic Rail

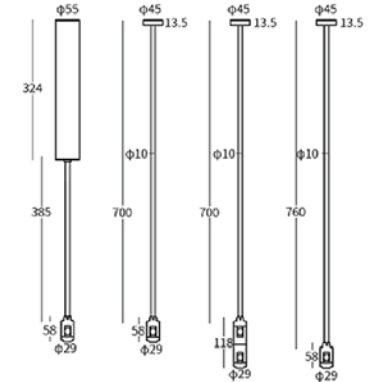


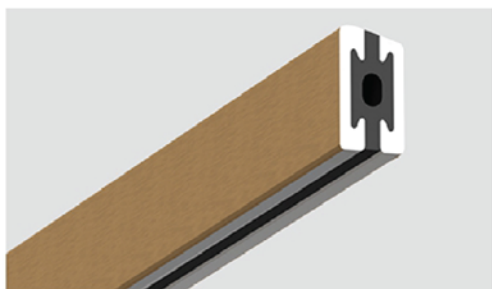



TRACK 24V
Magnetic Straight Track Rail

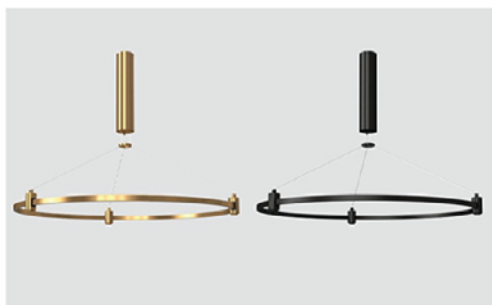

TRACK 24V
Magnetic Suspension Circular Track Rail

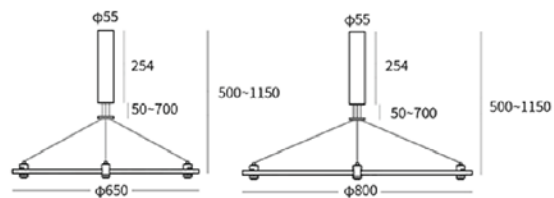

Magnetic Suitcase DC24V

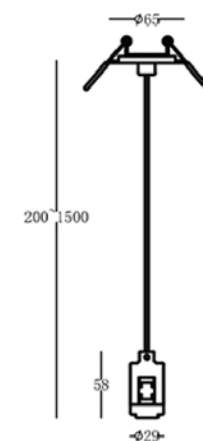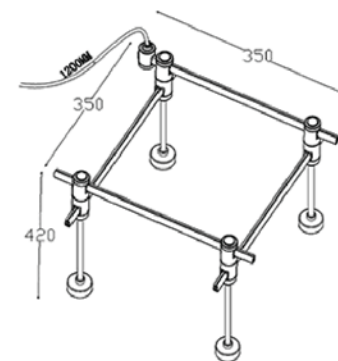

Pendant- Recessed flexible fastening+ Electric Cable(max 1200mm)

(Use for driver Placement,Suitable for Pendant ①②③④)





KEYLIGHT
SPAIN
LIGHTING PRODUCTS

KEYLIGHT BY LUCREATIVE

TEL: +34 677 65 56 22 — EMAIL: INFO@KEYLIGHTSPAIN.EU