



**KEYLIGHT**

SPAIN

LIGHTING PRODUCTS

**OUTDOOR LIGHTS**



# ABOUT US

**Keylight Spain** is a leading specialist in lighting products from Valencia, Spain.

We use the latest **LED technology** to create a unique range of lighting solutions.

Known by the high quality of our materials and innovative approaches when it comes to lighting, we offer a comprehensive selection of products, including LED lights, luminaires, drivers, control systems, accessories and more.

Our creative scope allows us to tackle even the most complex lighting projects, while our extensive experience and customer service ensure your lighting needs are met with the utmost satisfaction.

Therefore, our mission is to meet and satisfy the needs of our clients, with tailored products and services including collaborative marketing campaigns and market-specific product design to support our partners worldwide.





## KL-OD0063 / KL-OD0064

**Material:** Die-cast aluminium / PC Diffuser

**Voltage:** 220-240V / 50-60Hz



**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C



3000K → 6500K

**CCT Switchable**  
3000/4000/6500K

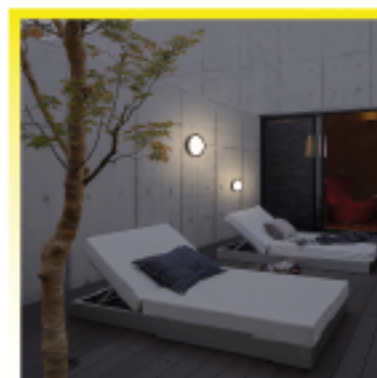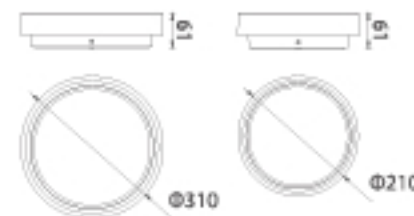

Item NO.	KL-OD0063	KL-OD0064
Watt	LED 22W	LED 40W
Luminous Flux	2000lm	3600lm
Beam Angle	120°	120°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.9	≥0.9



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS



## KL-OD0065 / KL-OD0066

**Material:** Die-cast aluminium / PC Diffuser

**Voltage:** 220-240V / 50-60Hz



**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C

White Silver Dark Grey Black

3000K → 6500K

CCT Switchable  
3000/4000/6500K

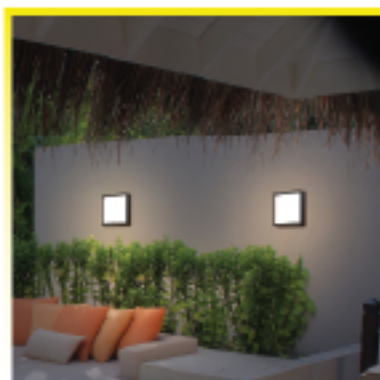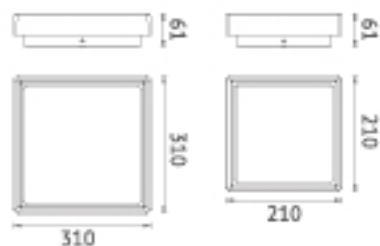

Item NO.	KL-OD0065	KL-OD0066
Watt	LED 22W	LED 40W
Luminous Flux	2000lm	3600lm
Beam Angle	120°	120°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.9	≥0.9



**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS







## KL-WM206

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz



**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C



3000K → 6500K

CCT Switchable  
3000/4000/6500K



KL-W206



KL-W206 - PIR



Item NO.	KL-W206	KL-W206 - PIR
Watt	LED SMD 21W	LED SMD 21W
Luminous Flux	1600lm	1600lm
Beam Angle	105°	105°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.9	≥0.9



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-W570 / KL-W571

**Material:** Die-cast aluminium / Glass Diffuser



**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C



5000K → 6500K  
CCT Switchable  
3000/4000/6500K

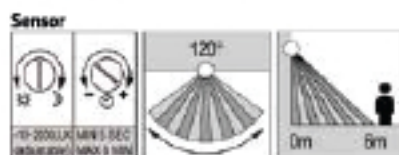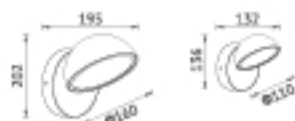

Item NO.	KL-W570	KL-W570-DN	KL-W571	KL-W571 - PIR
Watt	LED SMD 12W	LED SMD 12W	LED SMD 21W	LED SMD 21W
Luminous Flux	800lm	800lm	1500lm	1500lm
Beam Angle	120°	120°	120°	120°
CRI	80	80	80	80
Safety type	IP54 Class I	IP54 Class I	IP54 Class I	IP54 Class I
Power Factor	≥0.8	≥0.8	≥0.8	≥0.8







## KL-W471 / KL-W472 / KL-W473

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz



**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

White Silver Dark Grey Black

3000K → 6500K  
CCT Switchable  
3000/4000/6500K

Beam

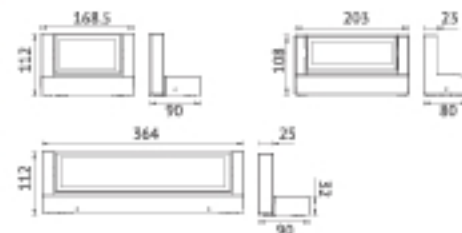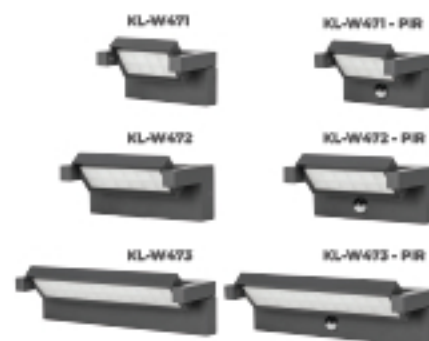

**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS

Item NO.	KL-W471	KL-W472	KL-W473
Watt	LED SMD 12W	LED SMD 21W	LED SMD 36W
Luminous Flux	1000lm	2000lm	4000lm
Beam Angle	95°	95°	95°
CRI	80	80	80
Safety type	IP65 Class I	IP65 Class I	IP65 Class I
Power Factor	≥0.8	≥0.8	≥0.8




## KL-W581 / KL-W582

**Material:** Die-cast aluminium / Glass Diffuser


**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C



3000K → 6500K  
CCT Switchable  
3000/4000/6500K

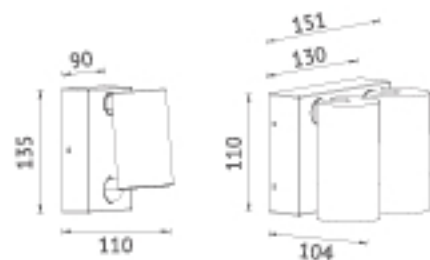

Item NO.	KL-W581	KL-W581-PIR	KL-W582	KL-W582-PIR
Watt	LED COB 8W	LED COB 8W	LED SMD 16W	LED SMD 16W
Luminous Flux	600lm	600lm	1200lm	1200lm
Beam Angle	38°	38°	38°	38°
CRI	80	80	80	80
Safety type	IP65 Class I	IP65 Class I	IP65 Class I	IP65 Class I
Power Factor	≥0.8	≥0.8	≥0.9	≥0.9







## KL-W584

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz



**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C




3000K → 6500K  
CCT Switchable  
3000/4000/6500K

KL-W584

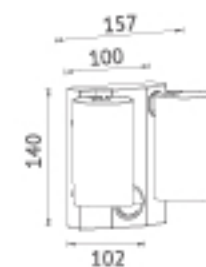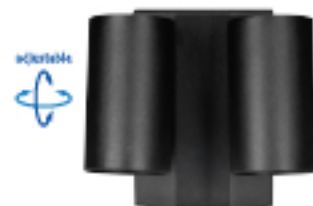

Sensor

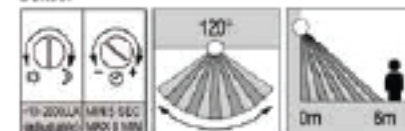

Item NO.	KL-W584	KL-W584-PIR
Watt	LED COB 16W	LED COB 16W
Luminous Flux	1200lm	1200lm
Beam Angle	38°	38°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.9	≥0.9



**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS





## KL-W585 / KL-W586



**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Working Temp.:** -20°C-40°C



Item NO.	KL-W585	KL-W585-PIR	KL-W586	KL-W586-PIR
Watt	GU10 MAX. 35W	GU10 MAX. 35W	GU10 MAX. 2X35W	GU10 MAX. 2X35W
Safety type	IP65 Class I	IP65 Class I	IP65 Class I	IP65 Class I





## KL-W003 / KL-W004

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K


**Working Temp.:** -20°C-40°C



KL-W003



KL-W004

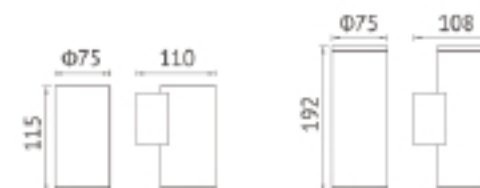

Item NO.	KL-W003	KL-W004
Watt	LED COB 6W	LED COB 2x7W
Luminous Flux	350lm	800lm
Beam Angle	30°	30°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.5	≥0.8



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS




## KL-W005 / KL-W006

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

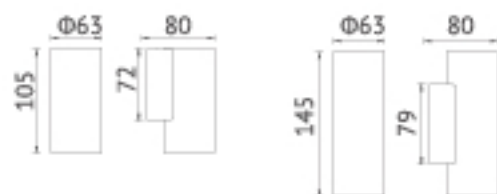

Item NO.	KL-W005	KL-W006
Watt	LED COB 8W	LED COB 2x8W
Luminous Flux	720lm	1200lm
Beam Angle	38°	38°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.8	≥0.8



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS







## KL-W007 / KL-W008


**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C

White Silver Dark Grey Black

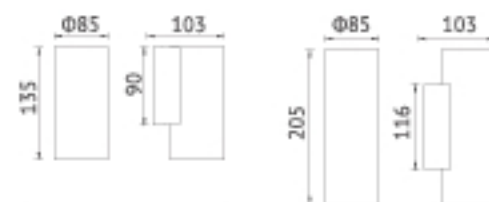

Item NO.	KL-W007	KL-W008
Watt	LED COB 12W	LED COB 20/2W
Luminous Flux	1000lm	2500lm
Beam Angle	38°	38°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.8	≥0.8



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS




## KL-W015 / KL-W016

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz


**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

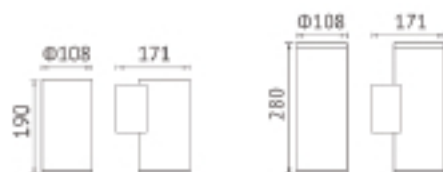

Item NO.	KL-W015	KL-W016
Watt	LED COB 12W	LED COB 2X12W
Luminous Flux	1200lm	2500lm
Beam Angle	38°	38°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.85	≥0.95

  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS

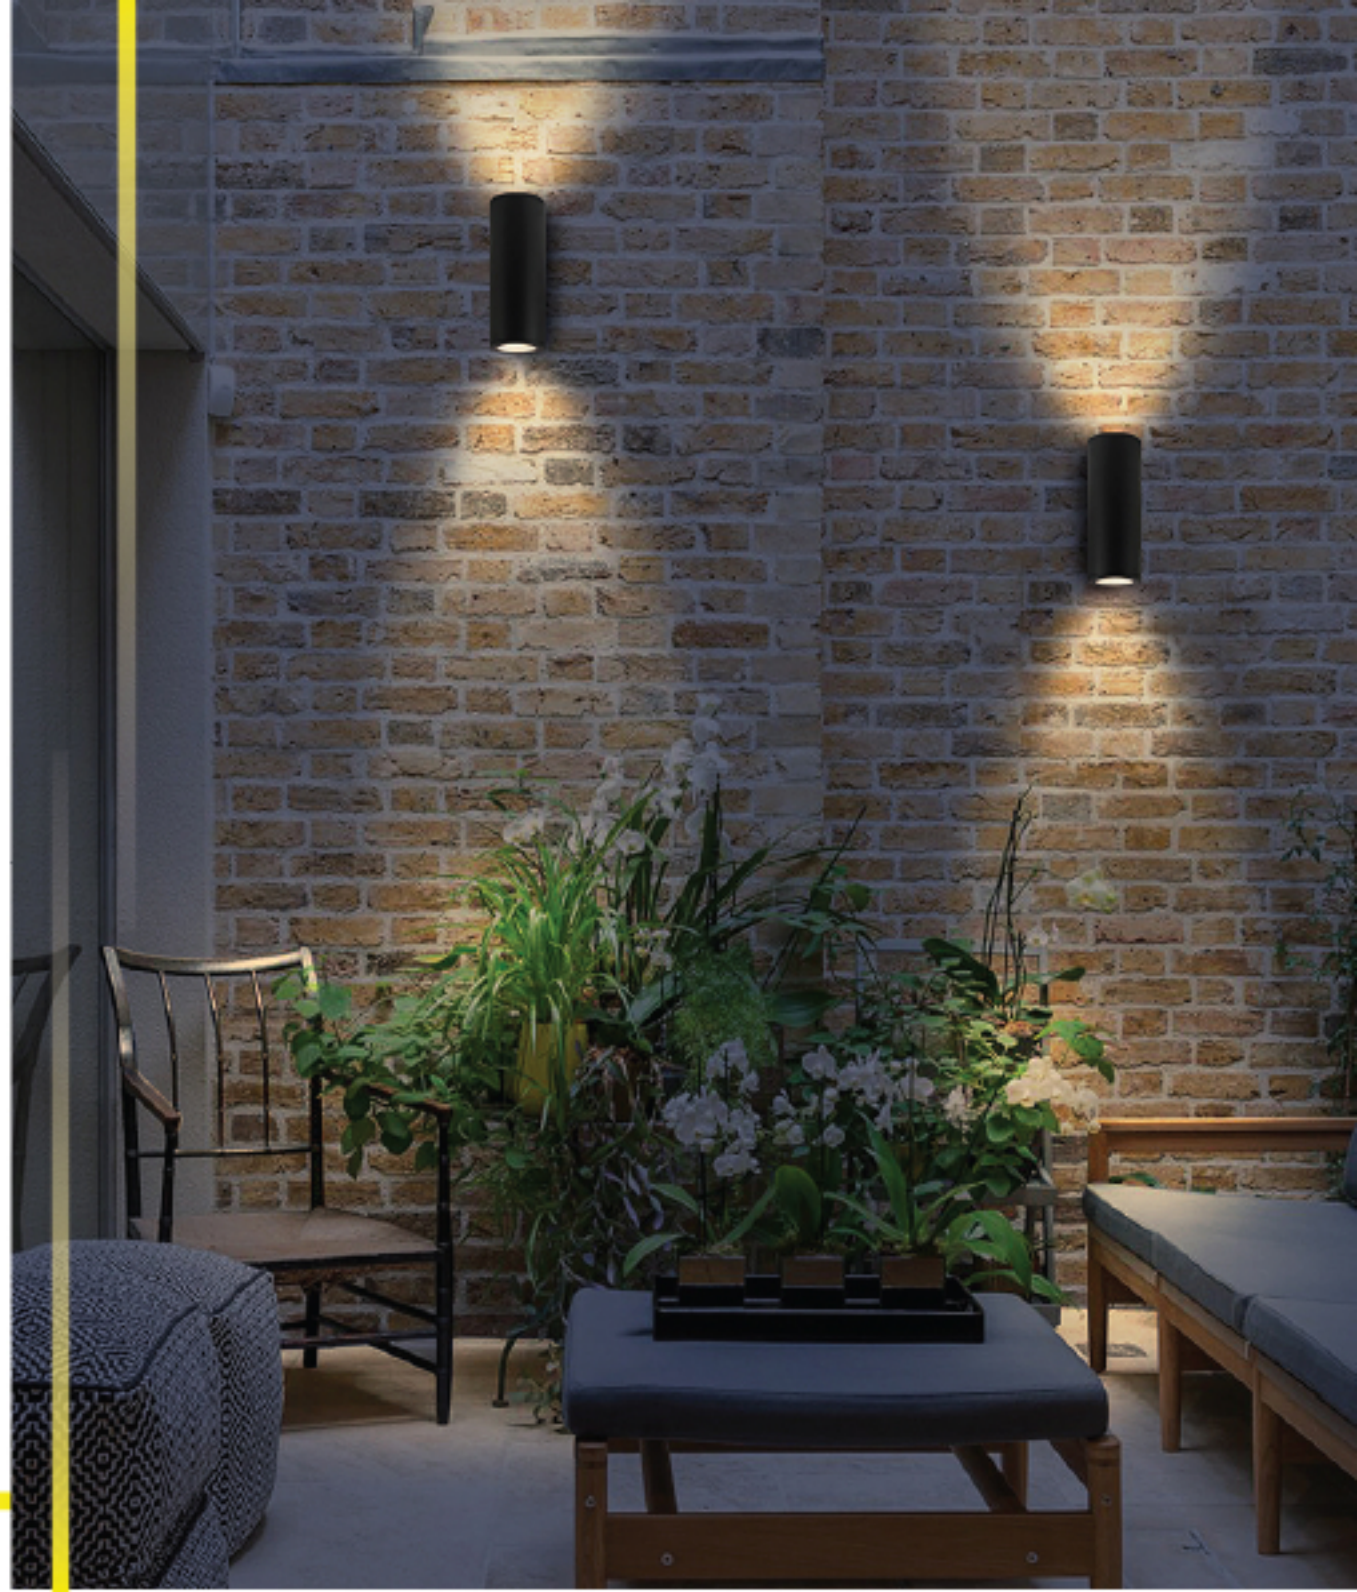





## KL-W223 / KL-W226 / KL-W228

**Material:** Die-cast aluminium / PC Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C



Item NO.	KL-W223	KL-W226	KL-W228
Watt	LED SMD 60W	LED SMD 40W	LED SMD 24W
Luminous Flux	5000lm	4000lm	2000lm
Beam Angle	120°	120°	120°
CRI	80	80	80
Safety type	IP65 Class I	IP65 Class I	IP65 Class I
Power Factor	≥0.9	≥0.9	≥0.9





## KL-W229

**Material:** Extrusion aluminum / PC Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C






KL-W229 - 600



KL-W229 - 900




KL-W229 - 1200

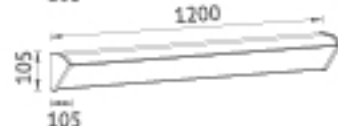

**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS

Item NO.	KL-W229-600	KL-W229-900	KL-W229-1200
Watt	LED SMD 40W	LED SMD 60W	LED SMD 80W
Luminous Flux	2800lm	5000lm	6500lm
Beam Angle	120°	120°	120°
CRI	80	80	80
Safety type	IP54	IP54	IP54
Power Factor	≥0.9	≥0.9	≥0.9

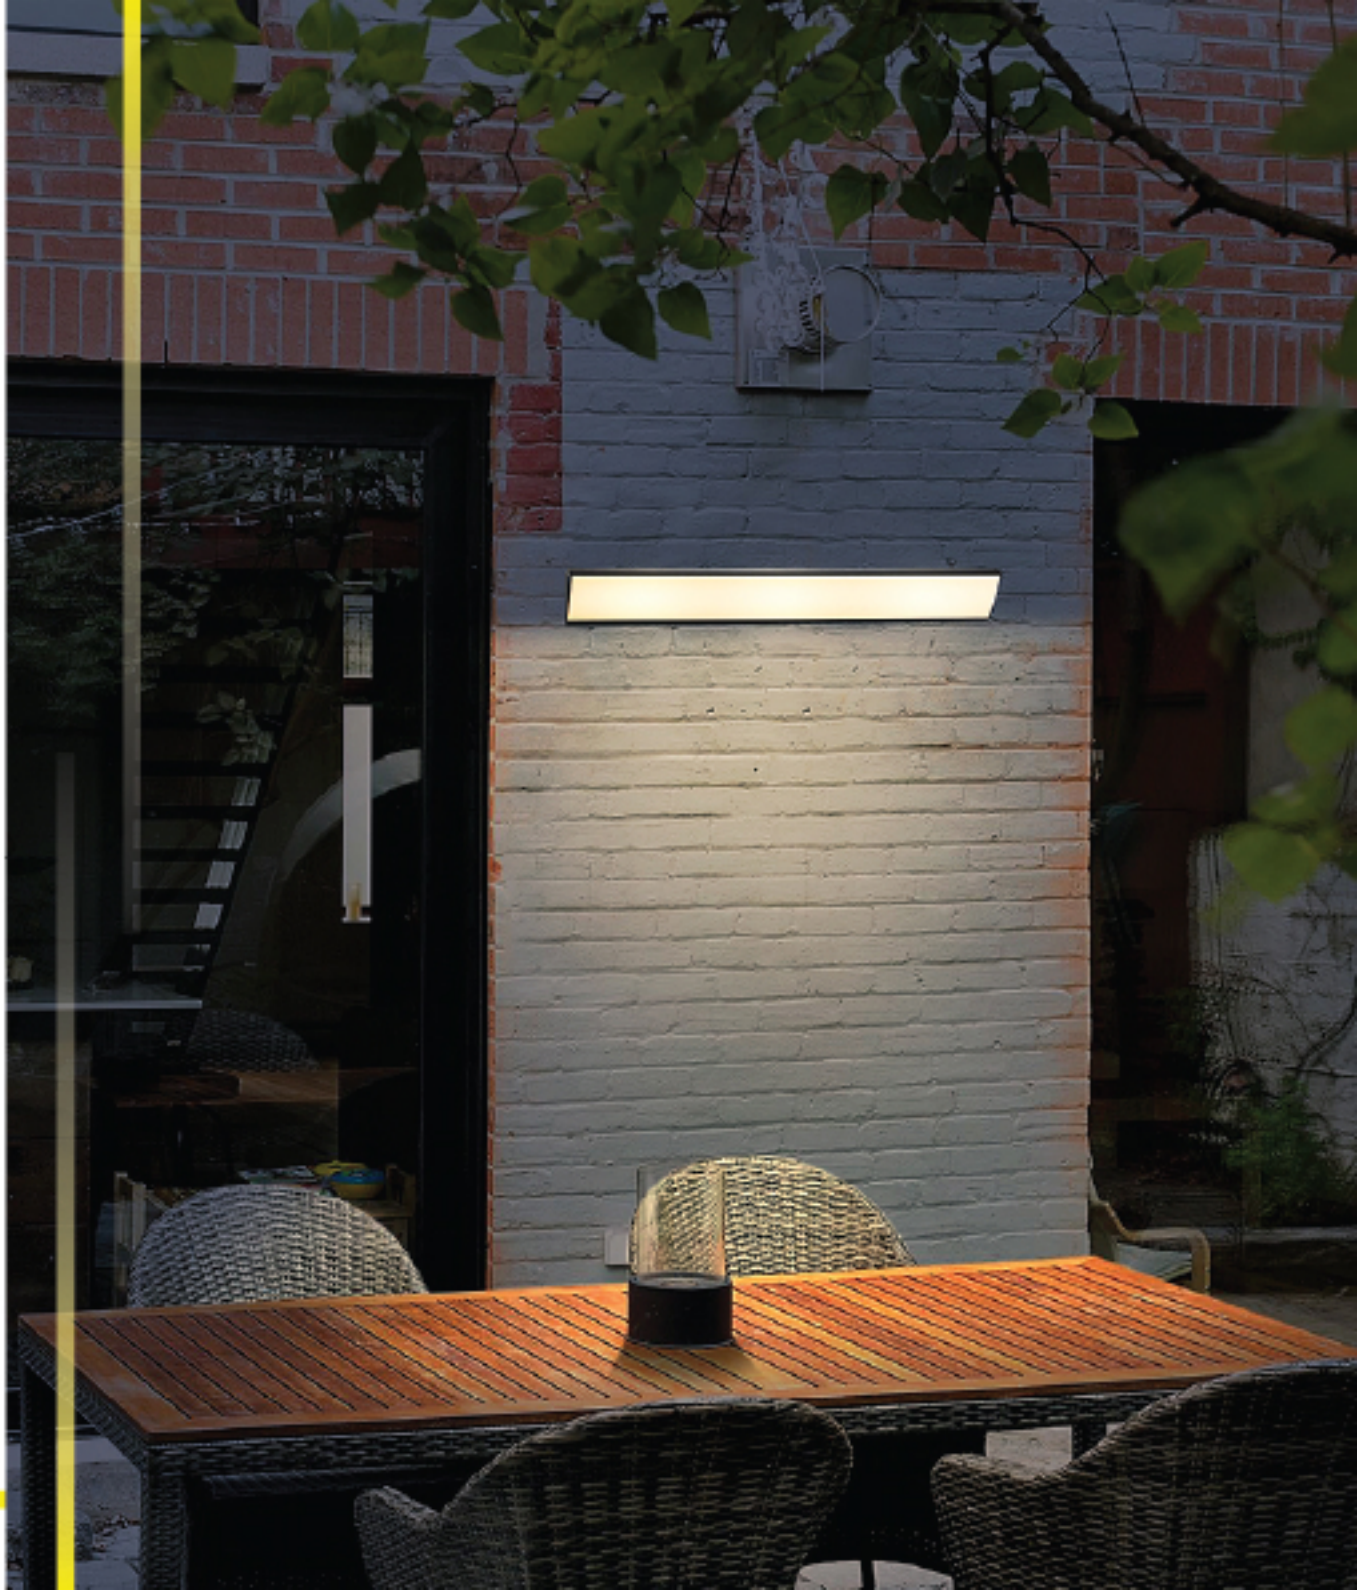





## KL-W167 / KL-W168

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

White Silver Dark Grey Black

KL-W168



KL-W167



Item NO.	KL-W167	KL-W168
Watt	LED SMD 4W	LED SMD 7W
Luminous Flux	320lm	510lm
Beam Angle	120°	120°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.5	≥0.9



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-W171 / KL-W176

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K


**Working Temp.:** -20°C~40°C



KL-W171



KL-W176

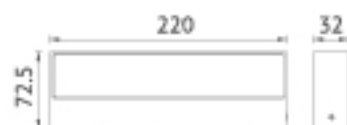

Item NO.	KL-W171	KL-W176
Watt	LED SMD 12W	LED SMD 2X8W
Luminous Flux	800lm	1300lm
Beam Angle	120°	120°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.95	≥0.95



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS





## KL-W177 / KL-W179

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz


**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C

White  
  Silver  
  Dark Grey  
  Black

3000K → 6500K

CCT Switchable  
3000/4000/6500K



KL-W177



KL-W179

Item NO.	KL-W177	KL-W179
Watt	LED SMD 20W	LED SMD 24W
Luminous Flux	1550lm	2200lm
Beam Angle	110°	110°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.96	≥0.95



**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS





## KL-W311 / KL-W312

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz


**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

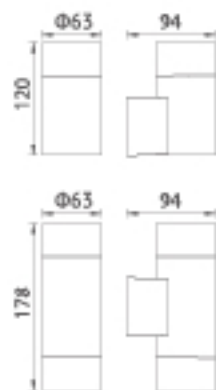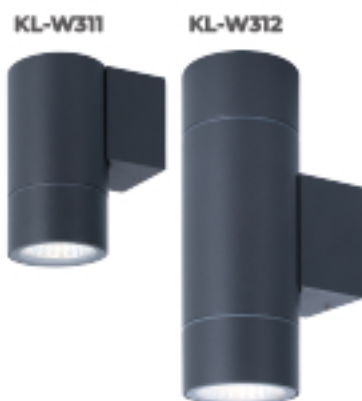

Item NO.	KL-W311	KL-W312
Watt	LED COB 7W	LED COB 13W
Luminous Flux	800lm	1500lm
Beam Angle	38°	38°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	$\geq 0.5$	$\geq 0.85$

**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS

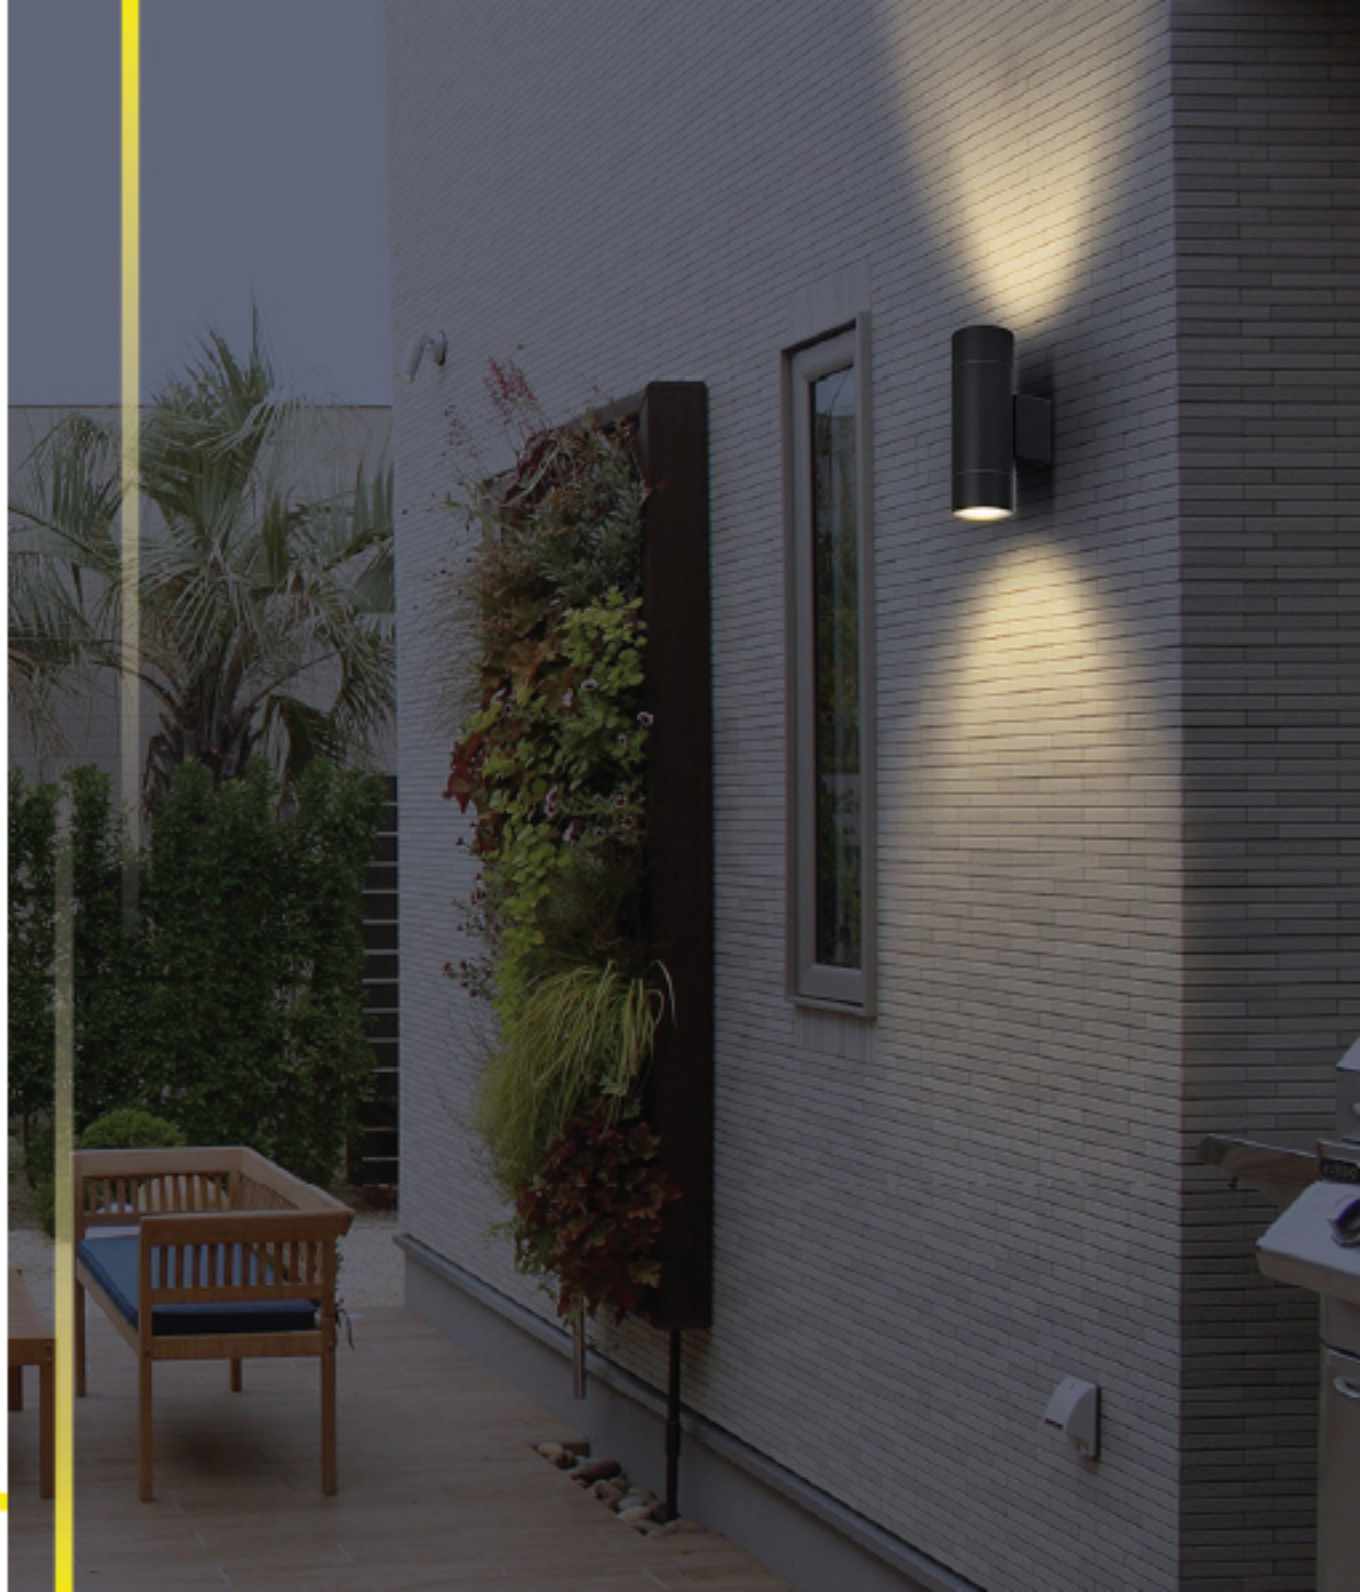





## KL-W315 / KL-W316

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C

White Silver Dark Grey Black

KL-W315



KL-W316



Item NO.	KL-W315	KL-W316
Watt	LED COB 7W	LED COB 13W
Luminous Flux	800lm	1500lm
Beam Angle	38°	38°
CRI	80	80
Safety type	IP54 Class I	IP54 Class I
Power Factor	≥0.8	≥0.8



**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS





## KL-W182 II

**Material:** Die-cast aluminium / Glass Diffuser


**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C



KL-W182 II

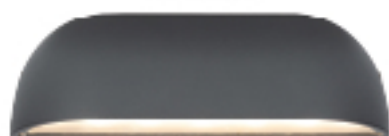

3000K → 6500K

CCT Switchable  
3000/4000/6500K



Item NO.	KL-W182 II
Watt	LED SMD7W
Luminous Flux	200lm
Beam Angle	120°
CRI	80
Safety type	IP65 Class I
Power Factor	≥0.5



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS








## KL-W181 / KL-W182 / KL-W183

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C



Item NO.	KL-W181	KL-W182	KL-W183
Watt	LED SMD 3.5W	LED SMD 6W	LED SMD 10W
Luminous Flux	150lm	260lm	720lm
Beam Angle	120°	120°	120°
CRI	80	80	80
Safety type	IP54	IP54	IP54
Power Factor	≥0.9	≥0.9	≥0.9



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-W550 / KL-W551

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C



Item NO.	KL-W550	KL-W551
Watt	LED SMD 7W	LED SMD 13W
Luminous Flux	500lm	890lm
Beam Angle	120°	120°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.5	≥0.5







## KL-W302 / KL-W302L

**Material:** Die-cast aluminium / PC Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C



KL-W302L



Item NO.	KL-W302	KL-W302L
Watt	LED SMD 10W	LED SMD 20W
Luminous Flux	700lm	1400lm
Beam Angle	120°	120°
CRI	80	80
Safety type	IP54 Class I	IP54 Class I
Power Factor	≥0.9	≥0.9

  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS






## KL-W452

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

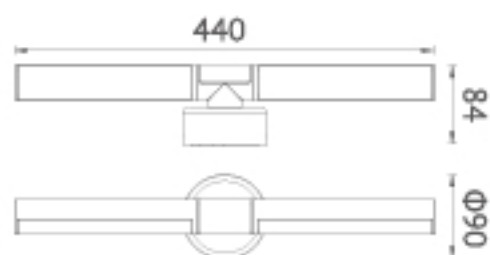

## KL-W452



Item NO.	KL-W452
Watt	LED SMD 13W
Luminous Flux	550lm
Beam Angle	120°
CRI	80
Safety type	IP54 Class I
Power Factor	≥0.8



**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS








## KL-OD0049 / KL-OD0048 KL-W051 / KL-W052

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Working Temp.:** -20°C-40°C

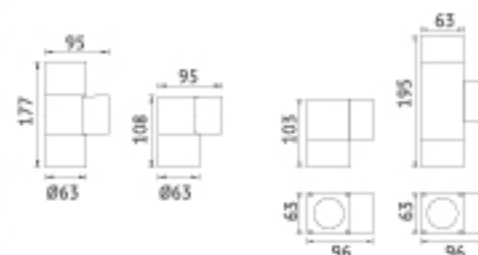

Item NO.	KL-OD0049	KL-OD0048	KL-W051	KL-W052
Watt	GU10 MAX.35W	GU10 X2 MAX.35W	GU10 MAX.35W	GU10 X2 MAX.35W
Safety type	IP65 Class I	IP65 Class I	IP54 Class I	IP54 Class I



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-OD0047 / KL-OD0046 KL-W111 / KL-W112


**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz


**Working Temp.:** -20°C~40°C



KL-OD0047 KL-OD0046



KL-W111 KL-W112

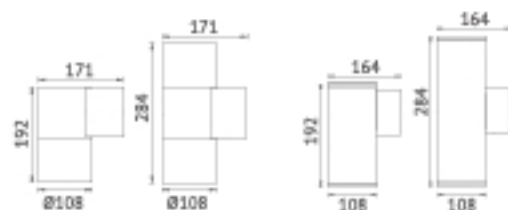

Item NO.	KL-OD0047	KL-OD0046	KL-W111	KL-W112
Watt	E27 MAX 60W	E27 200MAX 60W	E27 MAX 60W	E27 200MAX 60W
Safety type	IP65 Class I	IP65 Class I	IP65 Class I	IP65 Class I



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS






## KL-W231

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Working Temp.:** -20°C-40°C

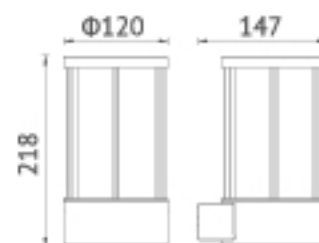

Item NO.	KL-W231
Watt	E27 Max.60W
Safety type	IP44



**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS



## KL-OD0014 / KL-OD0014-PIR

**Material:** Die-cast aluminium / PC Diffuser



**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C



KL-OD0014      KL-OD0014-PIR

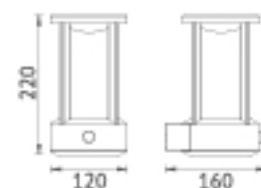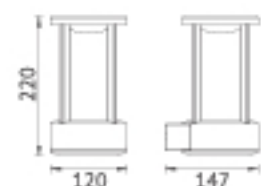

Item NO.	KL-OD0014	KL-OD0014-PIR
Watt	LED SMD 13W	LED SMD 13W
Luminous Flux	800lm	800lm
Beam Angle	120°	120°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.85	≥0.85



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS





## KL-OD0067 - KL-OD0068 - KL-OD002

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Working Temp.:** -20°C-40°C

White
  Silver
  Dark Grey
  Black


KL-OD0067



KL-OD0068



KL-OD002

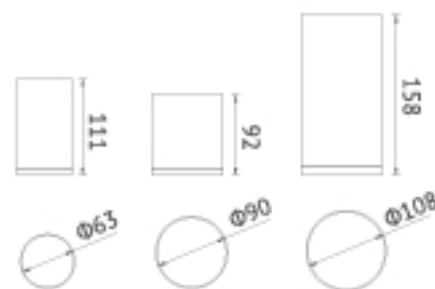

Item NO.	KL-OD0067	KL-OD0068	KL-OD002
Watt	GU10 MAX.35W	E27	GU10 MAX.35W
Safety type	IP65 Class I	IP65 Class I	IP65 Class I



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-C003 / KL-C014 KL-C113 / KL-C114

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C


 White Silver Dark Grey Black

KL-C003




KL-C014



KL-C113



KL-C114

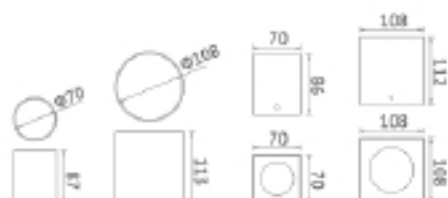

Item NO.	KL-C003	KL-C014	KL-C113	KL-C114
Watt	LED COB 7W	LED COB 7W	LED COB 13W	LED COB 13W
Luminous Flux	580lm	580lm	1000lm	1000lm
Beam Angle	38°	38°	38°	38°
CRI	80	80	80	80
Safety type	IP54 Class I	IP54 Class I	IP54 Class I	IP54 Class I
Power Factor	≥0.8	≥0.8	≥0.8	≥0.8



**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS








## KL-B212 / KL-B213

**Material:** Die-cast aluminium / PC Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

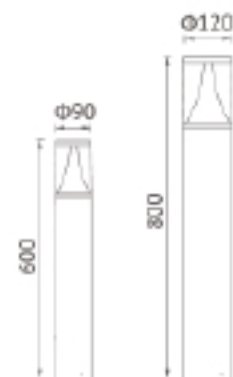

Item NO.	KL-B212	KL-B213
Watt	LED 12W	LED 22W
Luminous Flux	900lm	1900lm
Beam Angle	180°	180°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.9	≥0.9



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-B601 / KL-B602

**Material:** Die-cast aluminium / PC Diffuser


**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C



3000K → 6500K  
CCT Switchable  
3000/4000/6500K

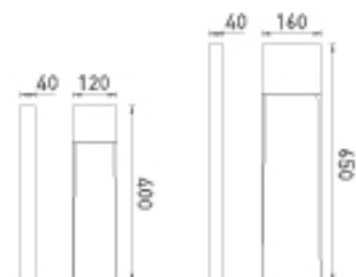

Item NO.	KL-B602	KL-B601
Watt	LED12W	LED 8W
Luminous Flux	820lm	580lm
Beam Angle	68°	68°
CRI	80	80
Safety type	IP65 Class I	IP65 Class I
Power Factor	≥0.85	≥0.85



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS








## KL-W235

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Working Temp.:** -20°C-40°C

White
  Silver
  Dark Grey
  Black

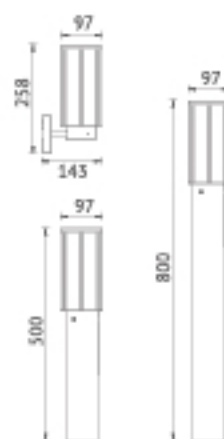

KL-W235



KL-B235-800



KL-B235-500



Item NO.	KL-W235	KL-B235-800	KL-B235-500
Watt	E27 MAX.6W	E27 MAX.6W	E27 MAX.6W
Safety type	IP44	IP44	IP44



**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS




## KL-B231 / KL-B231-500 KL-B231-800

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Working Temp.:** -20°C-40°C

White Silver Dark Grey Black

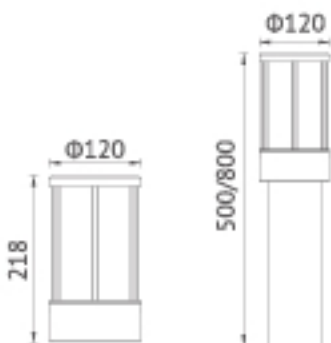

Item NO.	KL-B231	KL-B231-500	KL-B231-800
Watt	E27 MAX.60W	E27 MAX.60W	E27 MAX.60W
Safety type	IP44	IP44	IP44



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS







## KL-OD0057 / KL-OD0058-800 KL-OD0058-800-PIR

**Material:** Die-cast aluminium / PC Diffuser


**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C

White
  Silver
  Dark Grey
  Black

KL-OD0057 KL-OD0058-800 KL-OD0058-800-PIR

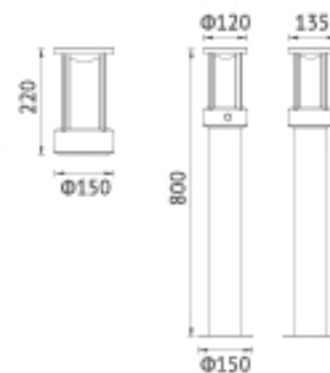

Item NO.	KL-OD0057	KL-OD0058-800	KL-OD0058-800-PIR
Watt	LED SMD 13W	LED SMD 13W	LED SMD 13W
Luminous Flux	800lm	800lm	800lm
Beam Angle	35°	35°	35°
CRI	80	80	80
Safety type	IP65 Class I	IP65 Class I	IP65 Class I
Power Factor	≥0.85	≥0.85	≥0.85






## KL-B236 / KL-B237

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 12-24V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

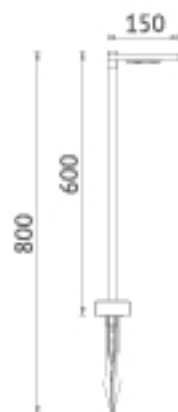

Item NO.	KL-B236	KL-B237
Watt	LED SMD 6W	LED AMB 6W
Luminous Flux	800lm	800lm
Beam Angle	120°	120°
CRI	80	80
Safety type	IP65 Class III	IP65 Class III
Power Factor	≥0.8	≥0.8



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS





## KL-B323-24V / KL-B324-24V

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 12-24V / 50-60Hz


**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C



KL-B323-24V

KL-B324-24V

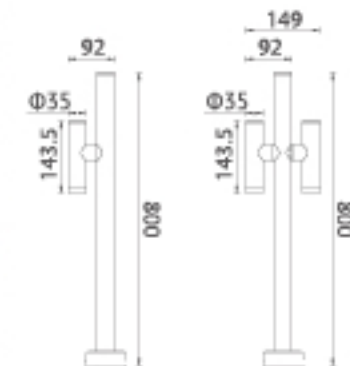

Item NO.	KL-B323-24V	KL-B324-24V
Watt	LED SMD 3W	LED COB 2X3W
Luminous Flux	200lm	400lm
Beam Angle	32°	32°
CRI	80	80
Safety type	IP54 Class III	IP54 Class III
Power Factor	≥0.8	≥0.8



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS




## KL-B238

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 12-24V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C

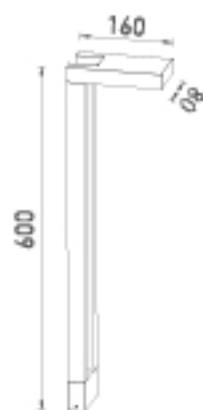


Plastic spike



Item NO.	KL-B238
Watt	LED SMD 6W
Luminous Flux	300lm
Beam Angle	120°
CRI	80
Safety type	IP54 Class III
Power Factor	≥0.9



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS

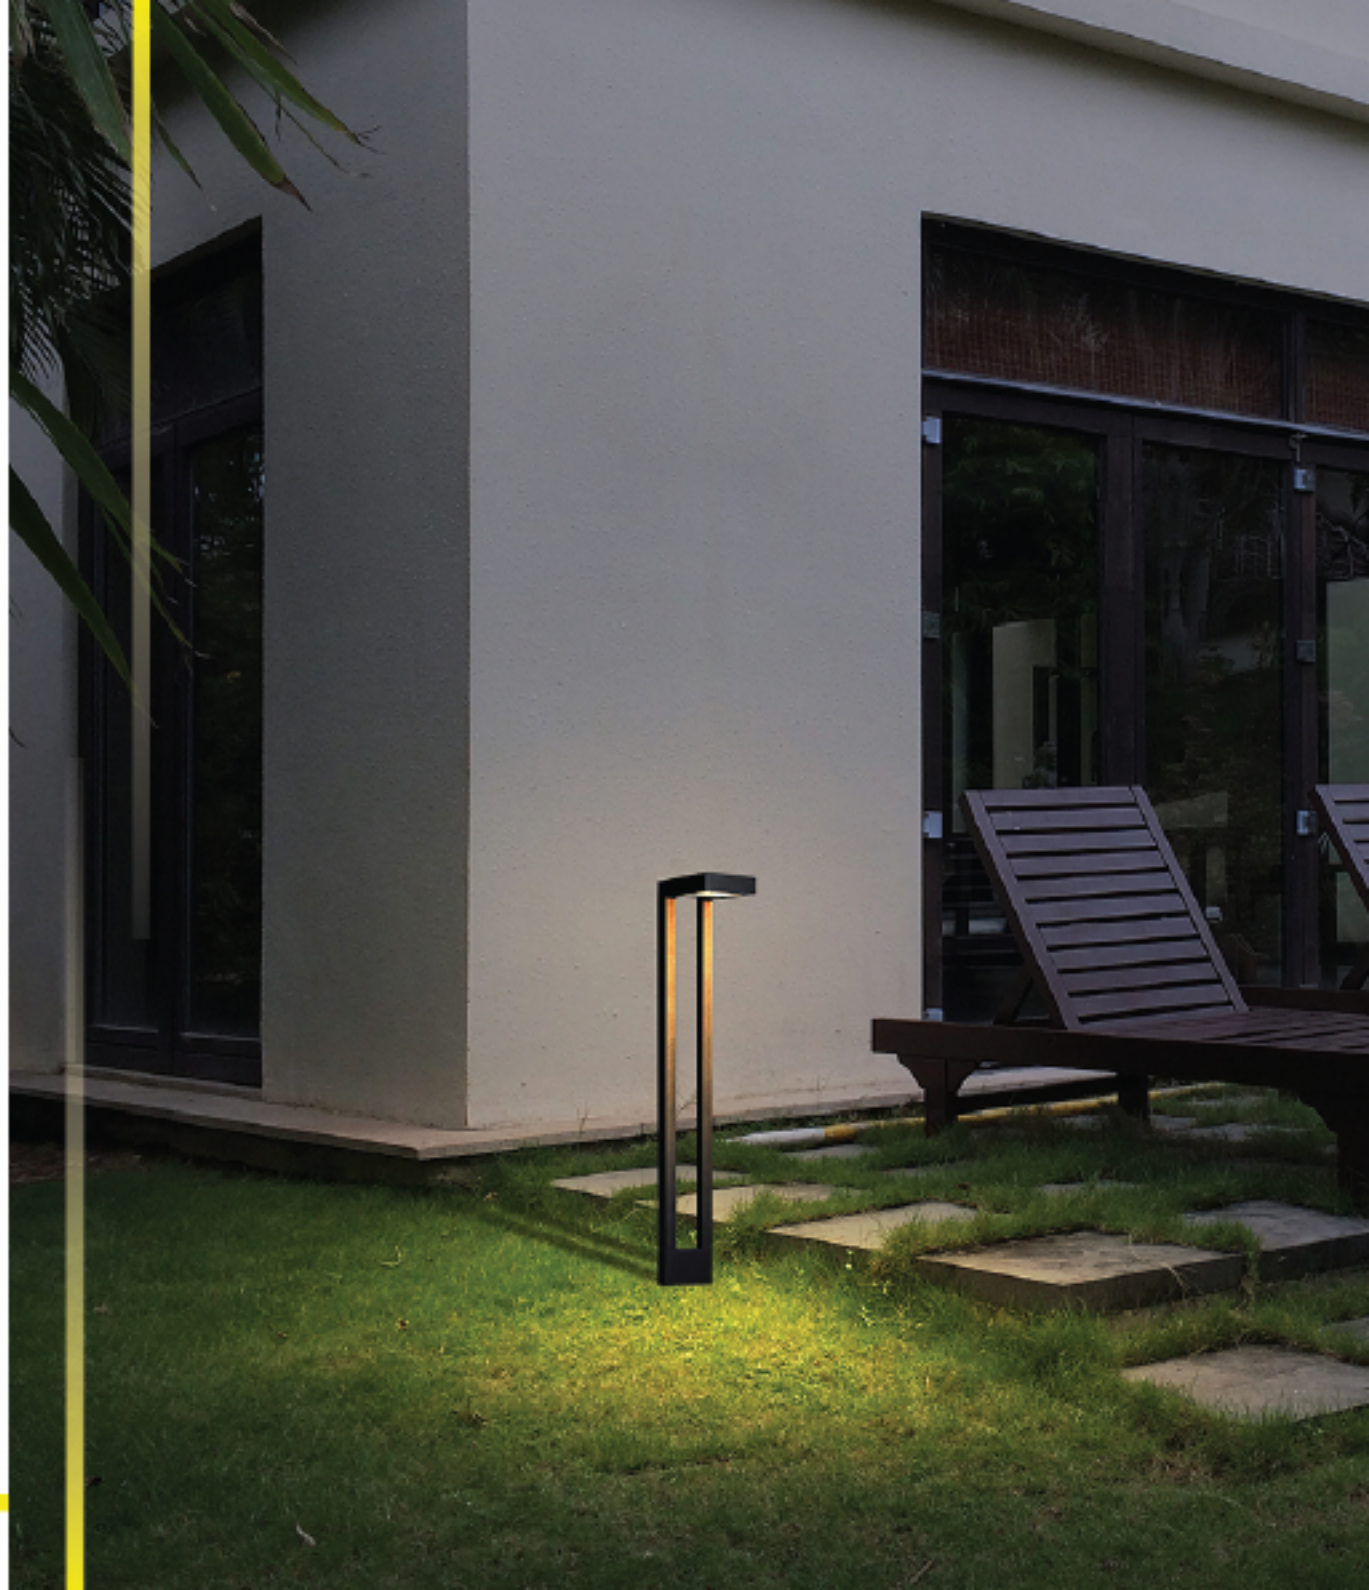





## KL-WM054 / KL-WR054A / KL-WR054B


**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

White Silver Dark Grey Black

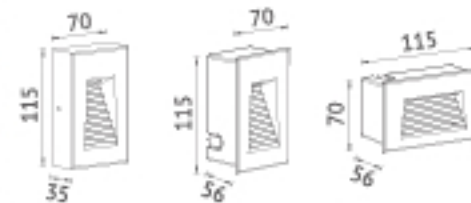

Item NO.	KL-WR054A	KL-WR054B	KL-WR054
Watt	LED 3.5W	LED 3.5W	LED 3.5W
Luminous Flux	150lm	180lm	150lm
Beam Angle	70°	80°	70°
CRI	80	80	80
Safety type	IP54 Class I	IP54 Class I	IP54 Class I
Power Factor	≥0.5	≥0.5	≥0.5



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-WM057 / KL-WM058

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K


**Working Temp.:** -20°C~40°C



KL-WM057




KL-WM058

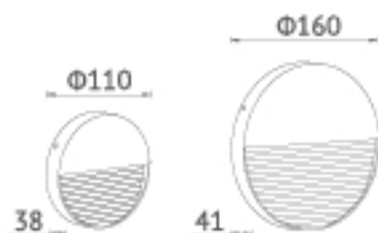

Item NO.	KL-WM057	KL-WM058
Watt	LED 3W	LED 6W
Luminous Flux	150lm	400lm
Beam Angle	80°	80°
CRI	80	80
Safety type	IP54 Class I	IP54 Class I
Power Factor	≥0.5	≥0.5



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS

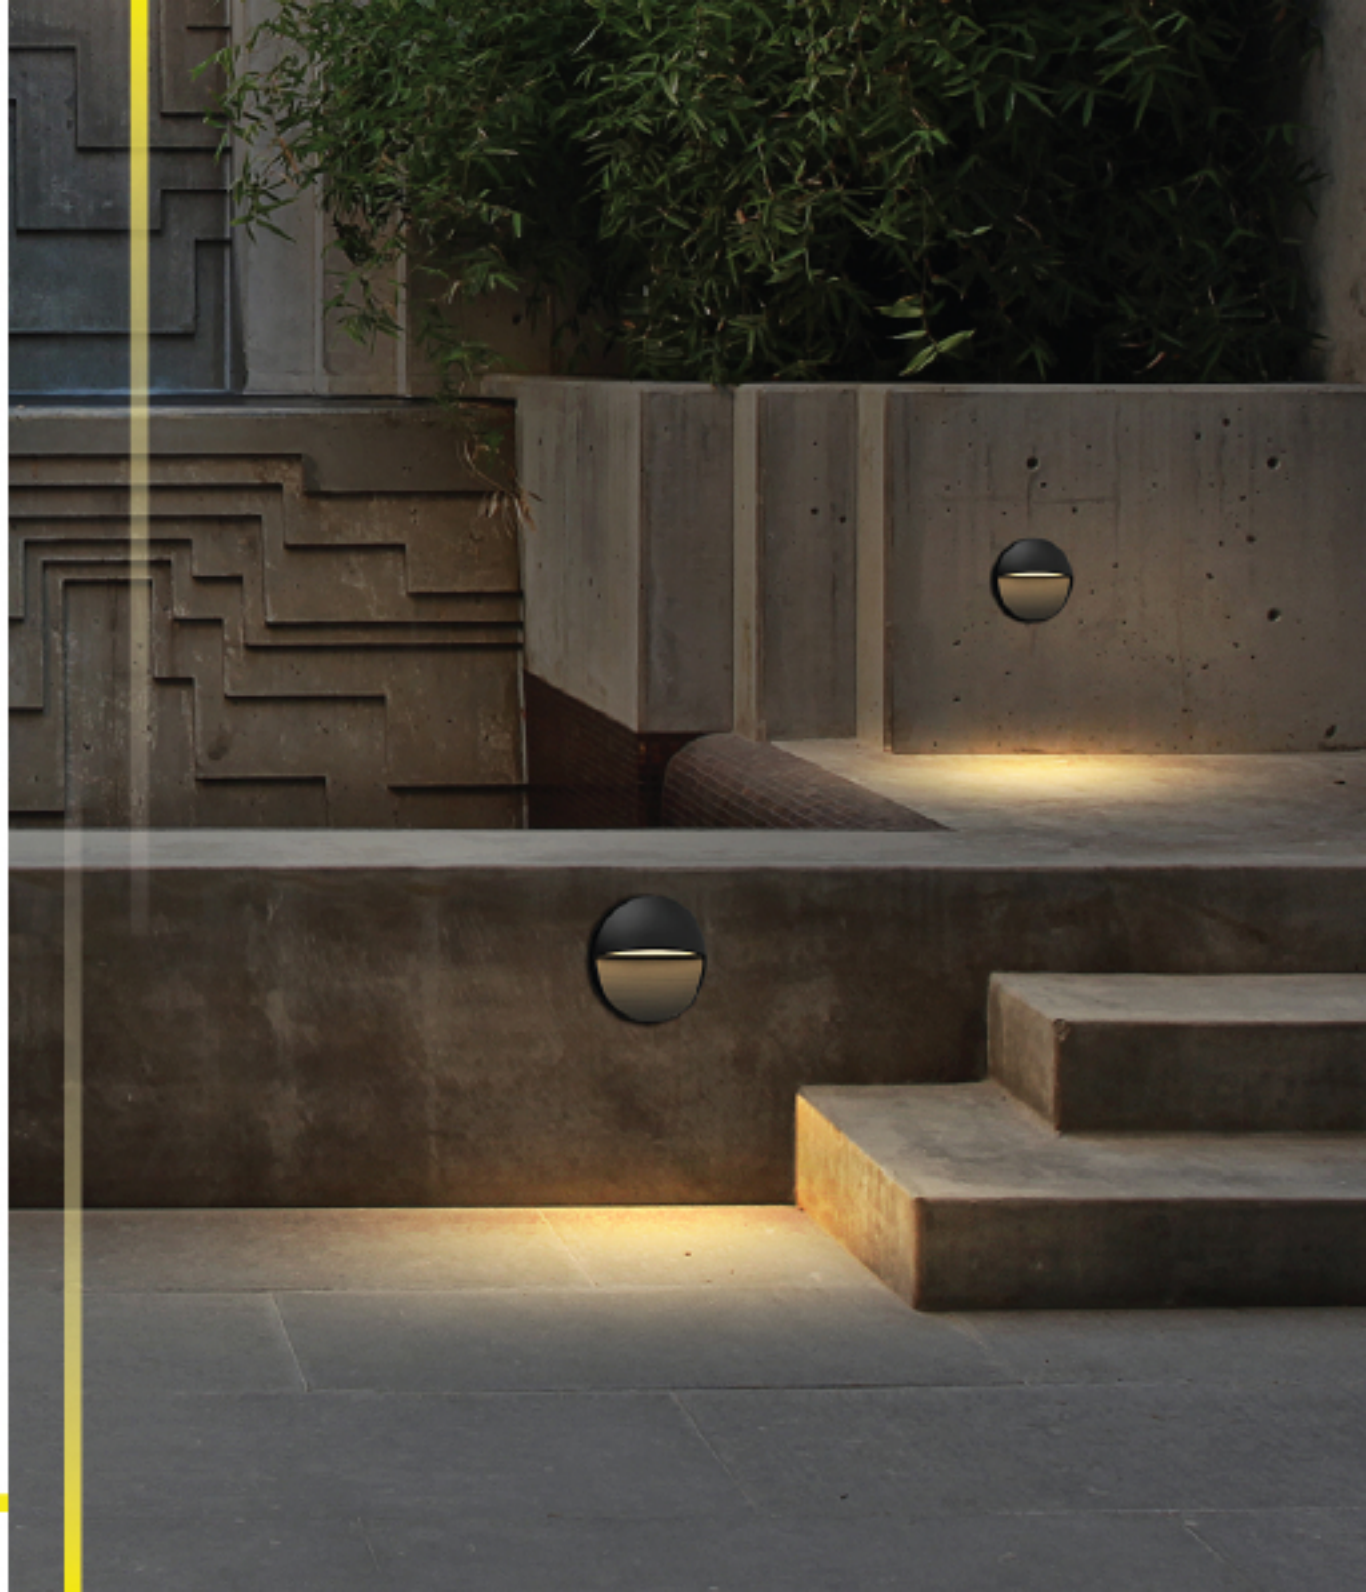





## KL-WR052

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz


**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

White
  Silver
  Dark Grey
  Black

3000K → 6500K

CCT Switchable  
3000/4000/6500K

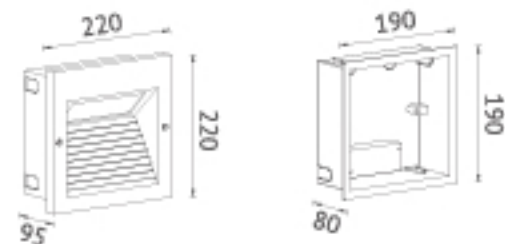

Item NO.	KL-WR052
Watt	LED 20W
Luminous Flux	1450lm
Beam Angle	80°
CRI	80
Safety type	IP65 Class I
Power Factor	≥0.9



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS






## KL-WR030 / KL-WR040

**Material:** Die-cast aluminium / Glass Diffus

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C~40°C

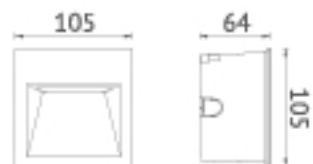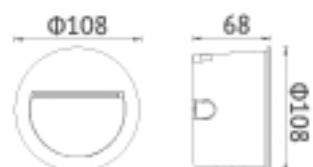

Item NO.	KL-WR030	KL-WR040
Watt	LED SMD 4W	LED SMD 4W
Luminous Flux	100lm	100lm
Beam Angle	60°	65°
CRI	80	80
Safety type	IP54 Class I	IP54 Class I
Power Factor	≥0.5	≥0.5



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS





## KL-OD0039 / KL-WR041

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K



**Working Temp.:** -20°C~40°C



KL-OD0039



KL-WR041

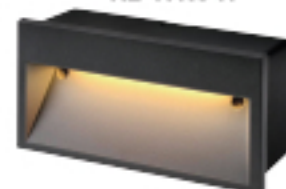

Item NO.	KL-OD0039	KL-WR041
Watt	LED SMD10W	LED SMD10W
Luminous Flux	250lm	250lm
Beam Angle	70°	70°
CRI	80	80
Safety type	IP54 Class I	IP54 Class I
Power Factor	≥0.9	≥0.9



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-OD0069



**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

White Silver Dark Grey Black

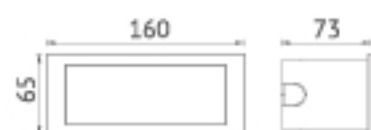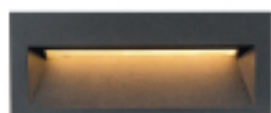

Item NO.	KL-OD0069
Watt	LED SMD 4W
Luminous Flux	180lm
Beam Angle	60°
CRI	80
Safety type	IP54 Class I
Power Factor	≥0.5



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS







## KL-WR048 / KL-WR049

**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K



**Working Temp.:** -20°C~40°C



KL-WR048



KL-WR049

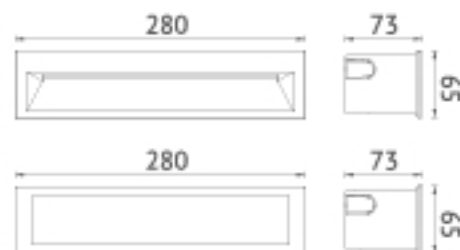

Item NO.	KL-WR048	KL-WR049
Watt	LED SMD 10W	LED SMD 10W
Luminous Flux	400lm	320lm
Beam Angle	68°	68°
CRI	80	80
Safety type	IP54 Class I	IP65 Class I
Power Factor	≥0.9	≥0.9



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS




## KL-S705

**Material:** Aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Working Temp.:** -20°C-40°C

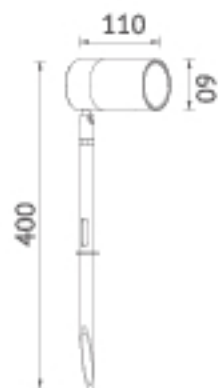

Item NO.	KL-S705	
Watt	GU10 MAX.35W	GU5.3 MAX.35W
Luminous Flux	-	-
Beam Angle	-	-
CRI	-	-
Safety type	IP65 CLASS I	
Power Factor	-	-



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS







## KL-S715 / KL-S716


**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

White Silver Dark Grey Black

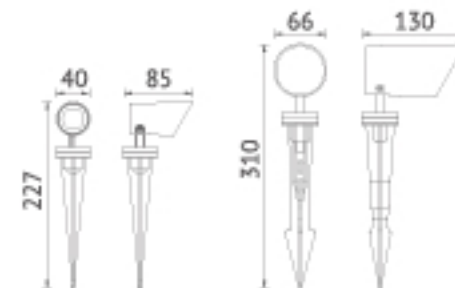

Item NO.	KL-S715	KL-S716
Watt	LED SMD 3W	LED COB 7W
Luminous Flux	200lm	470lm
Beam Angle	12° 24° 36°	12° 24° 36°
CRI	80	80
Safety type	IP65 Class III	IP65 Class I
Power Factor	≥0.54	≥0.54



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-S735 / KL-OD0043


**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

White Silver Dark Grey Black

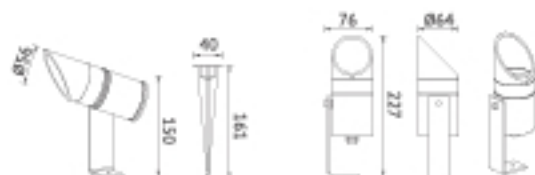

Item NO.	KL-S735	KL-OD0043
Watt	LED COB 7W	GU10 MAX30W
Luminous Flux	750lm	-
Beam Angle	24°	-
CRI	80	-
Safety type	IP65 CLASS I	IP65 CLASS I
Power Factor	≥0.5	-



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS










## KL-W157 / KL-W158

**Material:** Aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Working Temp.:** -20°C~40°C

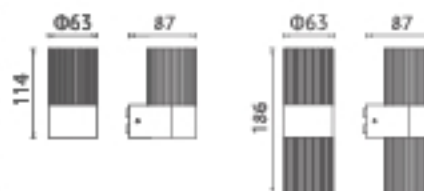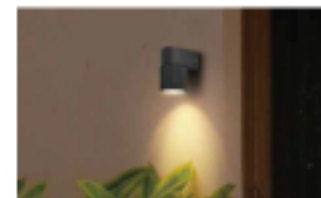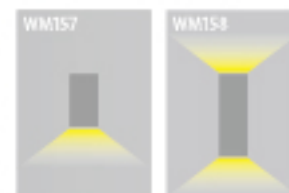

Item NO.	KL-W157	KL-W158
Watt	GU10 MAX.35W	GU10 20MAX.35W
Safety type	IP54 CLASS I	IP54 CLASS I



  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS



## KL-B591 / KL-B592

**Material:** Aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C




3000K → 6500K  
CCT Switchable  
3000/4000/6500K




Item NO.	KL-B591	KL-B592
Watt	LED 7W	LED 12W
Luminous Flux	520lm	800lm
Beam Angle	55°	55°
CRi	80	80
Safety type	IP65 CLASS I	IP65 CLASS I
Power Factor	≥0.85	≥0.85



  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS

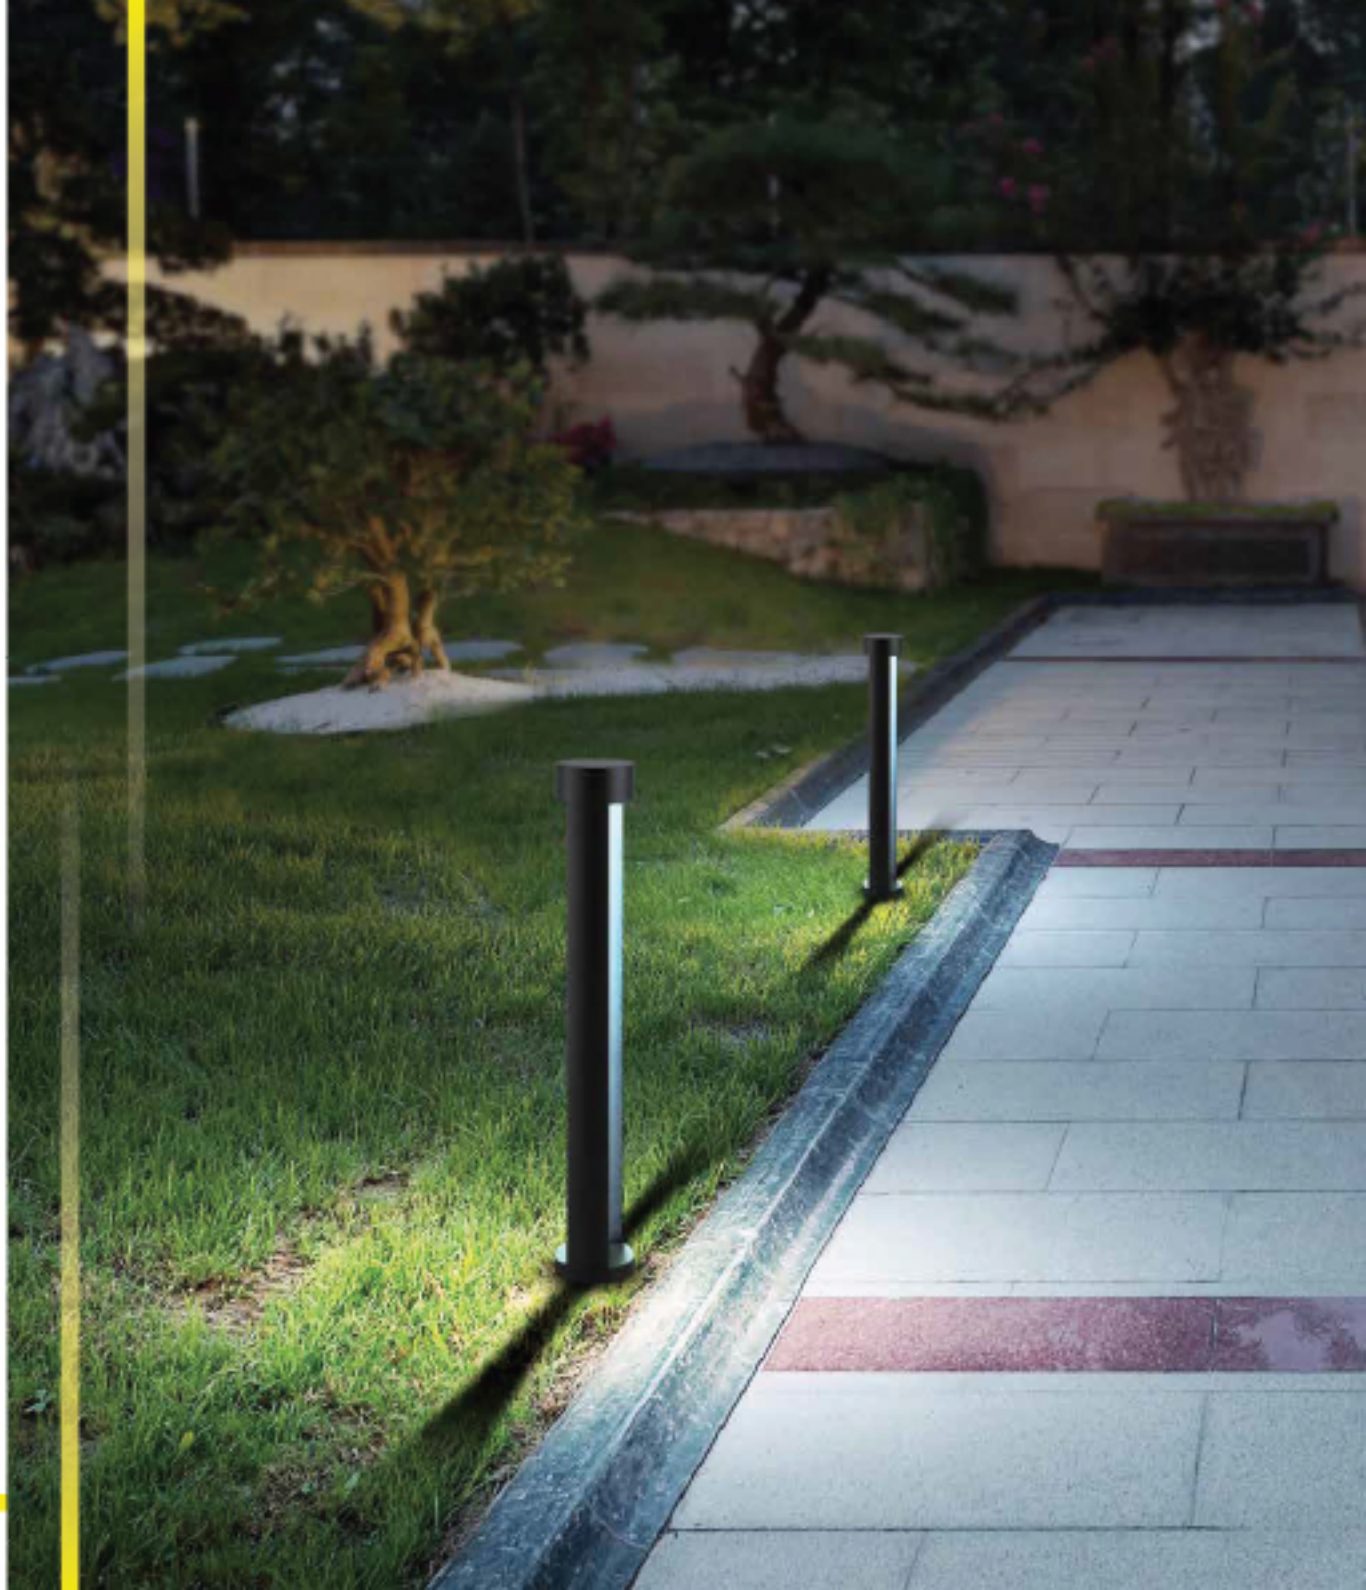



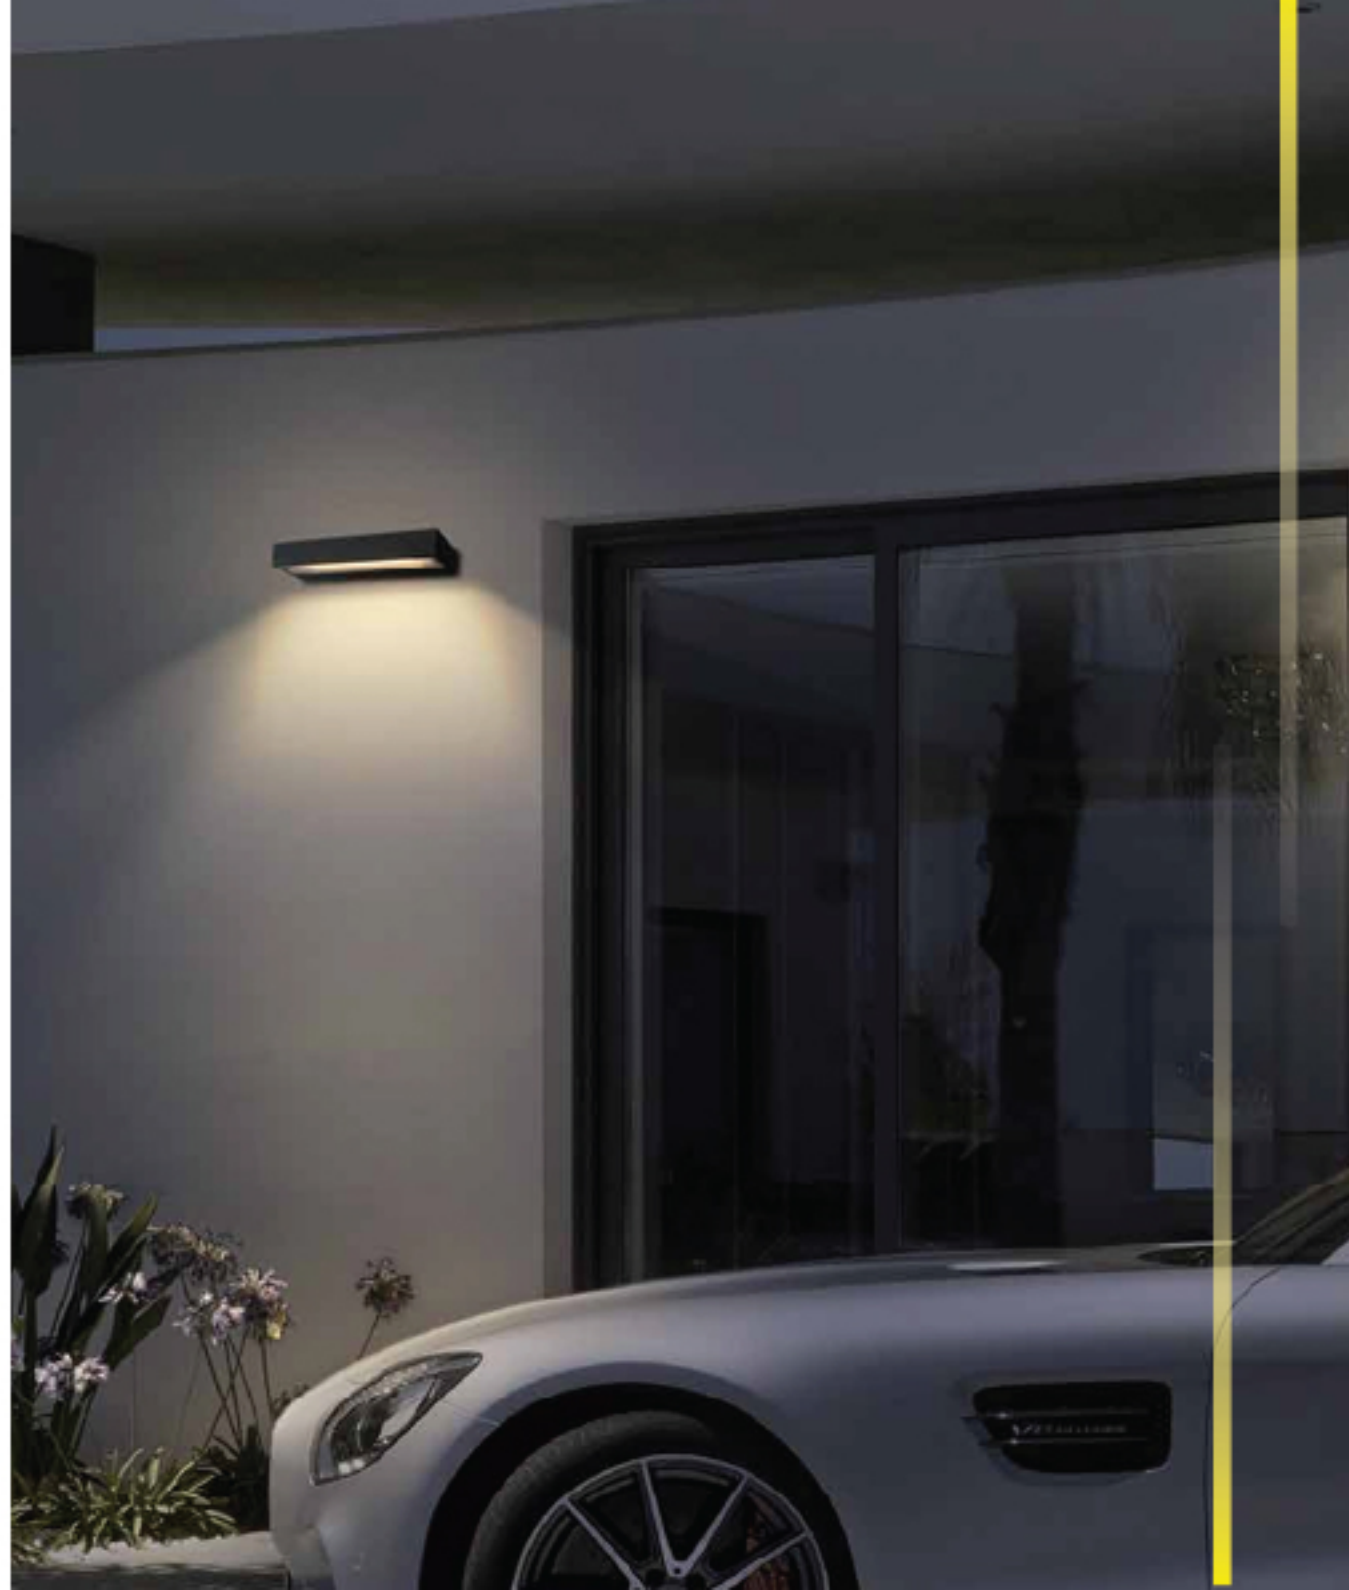

## KL-W171-III / KL-W176-III





**Material:** Die-cast aluminium / Glass Diffuser

**Voltage:** 220-240V / 50-60Hz

**Led Color Option:** 2700- 6500K

**Working Temp.:** -20°C-40°C

White Silver Dark Grey Black

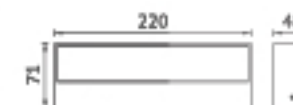



Item NO.	KL-W171-III	KL-W176-III
Watt	LED SMD 10W	LED SMD 20W
Luminous Flux	800lm	1200lm
Beam Angle	120°	120°
CRI	80	80
Safety type	IP65 CLASS I	IP65 CLASS I
Power Factor	≥0.95	≥0.95

  
**KEYLIGHT**  
 SPAIN  
 LIGHTING PRODUCTS







## FL-OD-10/20/30/50/100/200W

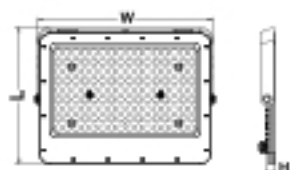

100W Light Distribution Curve



100W Lux Distance Curve



Model	Luminous	Beam Angle	Surge
FL-OD 10W	100-80lm/W	±0.5	±2KV
FL-OD 20W	100-80lm/W	±0.5	±2KV
FL-OD 30W	100-80lm/W	±0.5	±2KV
FL-OD 50W	100-80lm/W	±0.5	±2KV
FL-OD 100W	100-80lm/W	±0.5	±5KV
FL-OD 150W	100-80lm/W	±0.5	±8KV
FL-OD 200W	100-80lm/W	±0.5	±8KV



**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS



## OD-FL-50/100/150/200W



Item code	OD-FL-50W	OD-FL-100W	OD-FL-150W	OD-FL-200W
Description	LED Floodlight			
Construction	Die-cast Aluminum body			
Supply Voltage	100-240V AC 50Hz			
Colour	Black			
Power Output	50W	100W	150W	200W
Lumens Output	5000lm	10000lm	15000lm	20000lm
Lifespan	15,000h*			
Light Colour	3000K/6000K/ Green			
CRI	80+			
Operating Temperature	10°C to 50°C			
Lamp swiveling angle	120°			
Protection Class	Class I			
IP Rating	IP67			
Weight	0.8 kg	1.2 kg	1.8 kg	2.2 kg
Box Dimensions	202x50x208 mm	286x57x290 mm	328x57x335 mm	310x50x51 mm
Warranty	2 Years			



**KEYLIGHT**

SPAIN

LIGHTING PRODUCTS



## OD-ING-035 / OD-ING-045 OD-ING-055 / OD-ING-065

**Material:** Stainless Steel panel / Glass Diffuser

**Voltage:** DC12/24V / 50-60Hz

**Working Temp.:** -20°C-40°C



White Silver Dark Grey Black



Item NO.	OD-ING-035	OD-ING-045	OD-ING-055	OD-ING-065
Watt	LED 2W	LED 3W	LED 3W	LED 5W
Luminous Flux	100lm	150lm	150lm	250lm
Beam Angle	15°/30°	15°/30°	15°/30°	15°/30°
CRI	80	80	80	80
Safety type	IP65	IP65	IP65	IP65
Power Factor	≥0.5	≥0.5	≥0.5	≥0.5




  
**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS






### OD-ING-011

Stainless steel (SS304) body  
Tempered glass diffuser  
MR-11

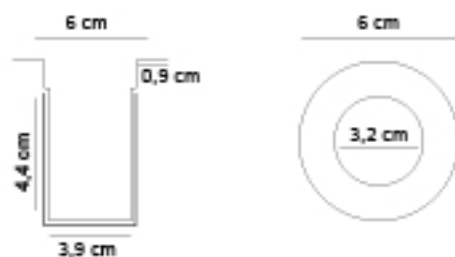

### OD-ING-102



Stainless steel (SS304) body  
Tempered glass diffuser  
GU10

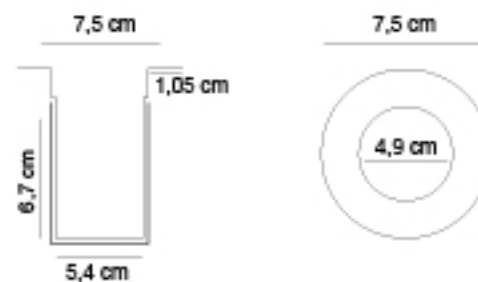

**KEYLIGHT**  
SPAIN  
LIGHTING PRODUCTS



## KL-OD-9A-E-40

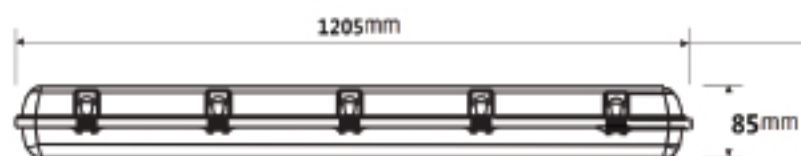

## SPECIFICATIONS

Product Code	KL-OD-9A-E-40
Power	40W
Final Lumen	4560lm
LED Quantity	SMD2835 216P
Power of Single LED	0.2W
Luminosity of single LED	28-30
Current of single LED	60MA
Volatge of single LED	3V
Color Temperature	3000k-6500k
RA	>80
Driver Input Power	40W
Driver Input Voltage	AC220V-240V
Driver Output Voltage	DC58V-114V
Power Factor	>0.9
THD	<10
Size	1205mm*85mm*95mm
IP Rating	IP65
Warranty	3 years







**KEYLIGHT**  
**SPAIN**  
LIGHTING PRODUCTS

**KEYLIGHT BY LUCREATIVE**

TEL: +34 677 65 56 22 — EMAIL: [INFO@KEYLIGHTSPAIN.EU](mailto:INFO@KEYLIGHTSPAIN.EU)