

Strip LED IP20

TECHNICAL SHEET

AZ-5125




KEYLIGHT

SPAIN

PRODUCTOS DE ILUMINACION

FEATURES

- 2200-6500K multi-color temperature optional
- High efficiency and up to 120lm/W, 3LEDs or 6LEDs per cutting unit electrical design
- Only one bin per color for carefree handling and re-ordering
- Regular binning within 3step or 5step Macadam
- Narrower color variance than ANSI/CIE standard
- Offer CRI up to Ra80
- Easy installation due to solder-free connectors system optionally

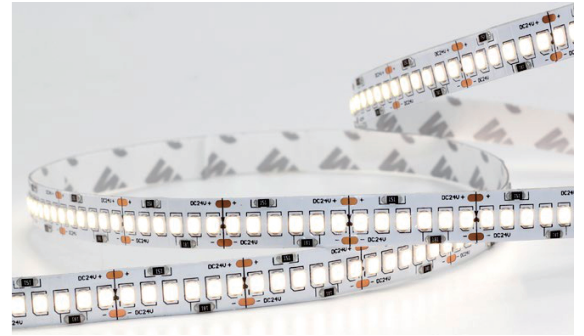

Beam Angle



IP Protection



Warranty



Power Supplies



Cables



Connectors

SPECIFICATIONS

Product Code	AZ-5125
IP Rating	IP20
ROHS Instruction	Environmental Protection
Connection Type	Simple Type Wire Connection
Color Temperature	3000/4000/6000k
Lifetime(H)	30000H
Input Power(W)	25W/M
Input Voltage(V)	12VDC
Power Factor	>0.9
Storage Temperature	-30°C ~ +50°C
Working Temperature	-20°C ~ +40°C
LED Luminous Flux	120LM/W
Beam Angle	120°
FPC board	10mm
LED Quantity	SMD2835 240LED/M
LED Type	KAIMEI
CRI	>80
SCDM	<5 SDM
Maximum Connection Length	5m
Minimum cut Length	7LED
Packaging Size(mm)	385mm*350mm*210mm
G.W(KGS)	6.9KG/CTN
Warranty	3-years



CB ErP RoHS CE

