

Strip LED IP65/67

TECHNICAL SHEET

AZ-IP65/67-1010




KEYLIGHT

SPAIN

PRODUCTOS DE ILUMINACION

FEATURES

- Silicone extrusion molding technology
- Side bend, vertical direction
- Excellent weather resistance and UV resistance
- Excellent flexibility for proper bending and easy modeling
- Working temperature:-25~40
- Storage temperature:-25~55

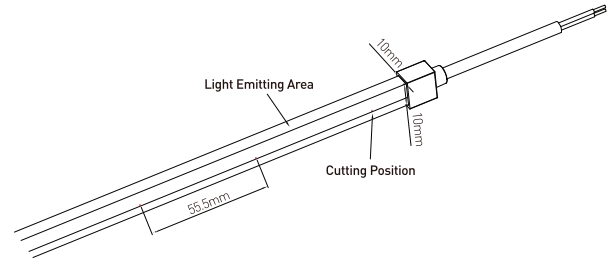

Flame Resistant



UV Resistant



Solvents Resistant



IK08 Protection

SPECIFICATIONS

Product Code	AZ-IP65/67-1010
IP Rating	IP65/67
ROHS Instruction	Environmental Protection
Connection Type	Simple Type Wire Connection
Color Temperature	3000/4000/6000k
Lifespan	7 years
Input Power(W)	9 W/M
Input Voltage(V)	24VDC
Power Factor	>0.9
Storage Temperature	-25°C ~ +55°C
Working Temperature	-25°C ~ +40°C
LED Luminous Flux	750LM/m
Beam Angle	120°
FPC board	10mm
LED Quantity	SMD2835 126P
Product Luminous Flux(lm)	1440lm ±10%
LED Type	EPISTAR
CRI	>80
SCDM	<5 SDM
Maximum Connection Length	5m
Minimum cut Length	50mm Lorem ipsum
Body Size	6mm*10mm
Warranty	3-years

RoHS

CE

facts®
A Program of the US DDE



